

# Tapo Smart Hub

Tapo H200

works with 

works with  Google Home



Up to 64 +4  
Devices

512GB

Local microSD Storage  
(Up to 512 GB)<sup>†</sup>



Smart Alarm




Smart Chime

## // Highlight

### Connects Up to 64 + 4 Devices

Build your smart home ecosystem with up to 64 sensors, Sub-1G switches\* or buttons + 4 cameras or video doorbells (Tapo C420, Tapo C400, and Tapo D230) connected. Easily and remotely control all of your devices from anywhere, at anytime through Tapo app.

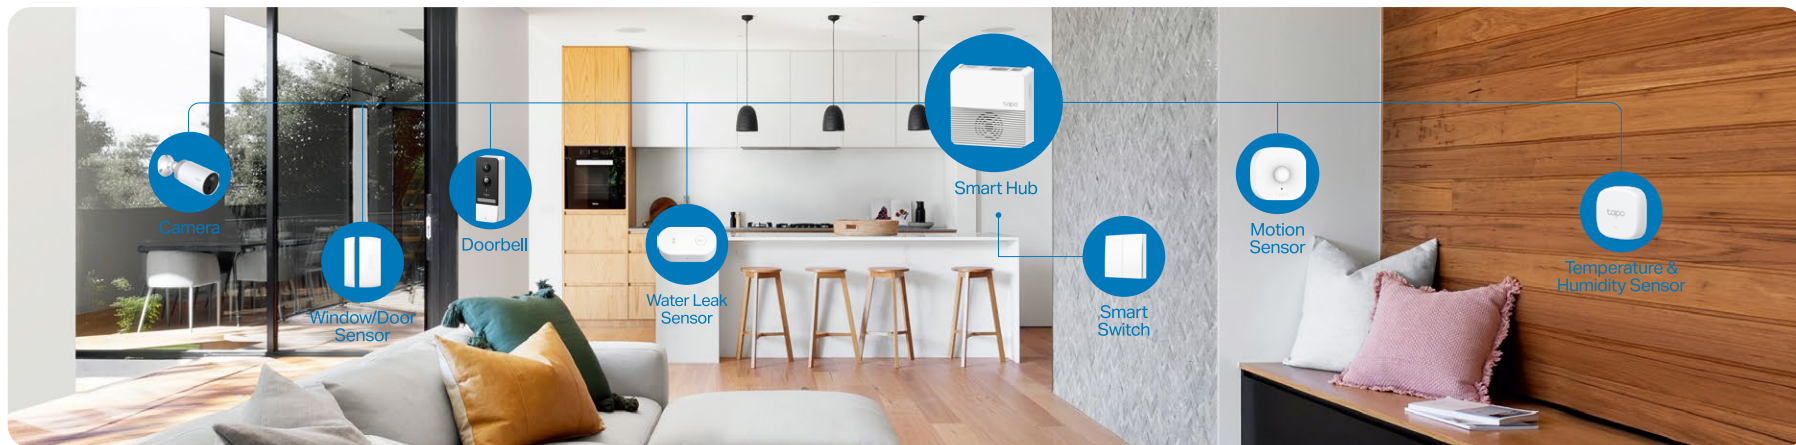

\*Tapo H200 only supports sub-1G devices working in specified frequency bands: 863.35MHz, 864.35MHz, 868.35MHz (for EU/UK) or 920.9MHz, 921.7MHz, 922.3MHz (for US/AU).

Note: Tapo H200 can only be used indoors and needs to be matched with other Tapo smart devices (sensors, buttons, Sub-1G switches, cameras, and video doorbells, purchased separately).


## Smart Alarm & Chime

Use the hub as a smart alarm or chime to protect your home security by coordinating with your Tapo smart cameras, video doorbells, sensors, and more.<sup>Δ</sup>



## Local microSD Storage (Up to 512 GB)

Save recorded videos from your smart cameras and doorbells to a microSD card<sup>†</sup> (up to 512 GB).

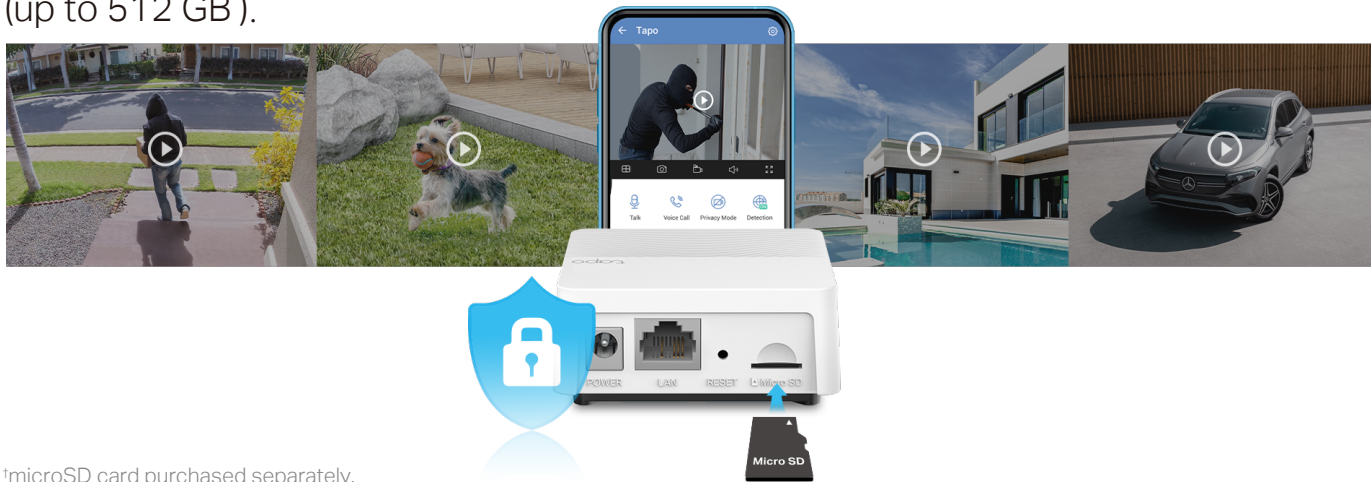

<sup>†</sup>microSD card purchased separately.

<sup>Δ</sup>Smart sensors or buttons sold separately.

Note: Tapo H200 can only be used indoors and needs to be matched with other Tapo smart devices (sensors, buttons, Sub-1G switches, cameras, and video doorbells, purchased separately).

## // Features

- **Ultra-Low-Power Performance**

An ultra-low-power wireless protocol extends your usage and ensures your battery-powered devices work longer.

- **Reliable Smart Actions**

Create smart actions and enjoy reliable hands-free home automation by using the hub with other Tapo smart devices.

- **Real-Time Notifications**

Monitor your entire home and all connected devices to get instant alerts when the activity is detected.

- **Device Sharing**

Easily share management permissions with each member of your family.

- **19 Ringtone Options**

Multiple built-in ringtones (bark, siren, doorbell, and more) and adjustable volume for your customized scenarios.

- **Voice Activated**

Works with Amazon Alexa and Google Home to control sensors, cameras or other Tapo devices with your voice.

- **Schedule & Timer**

Set customized schedules for your smart sensors, cameras, or other Tapo devices to get an automatic smart life.


## // Specifications

- Button: Reset/SYNC Button
- Wireless: 2.4 GHz Wi-Fi, Sub-1G\*
- Adapter Input: 100-240 V, 50/60 Hz, 0.3A
- Adapter Output: 9V , 0.85A
- Dimensions (L x W x H): 2.8 x 2.8 x 1.2 in.  
(71.45\*71.45\*31.25mm)
- Package Contents:
 

Tapo H200	Quick Start Guide
RJ45 Ethernet Cable	DC Power Adapter
- Certifications: CE, RoHS, RCM,
- Operating Temperature: 0 °C – 40 °C (32°F–104°F)
- Storage Temperature: -20 °C ~60 °C (-4°F~140°F)
- Operating Humidity: 10%~90%RH, Non-condensing
- Storage Humidity: 5%~90%RH, Non-condensing

\*Tapo H200 only supports sub-1G devices working in specified frequency bands: 863.35MHz, 864.35MHz, 868.35MHz (for EU/UK) or 920.9MHz, 921.7MHz, 922.3MHz (for US/AU).  
Note: Tapo H200 can only be used indoors and needs to be matched with other Tapo smart devices (sensors, buttons, Sub-1G switches, cameras, and video doorbells, purchased separately).

## // Device Appearance

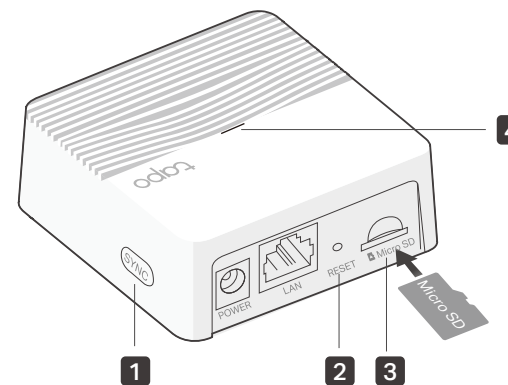

- 1 SYNC Button**  
Press to pair with the camera/video doorbell/sensor/button/Sub-1G switch, or silence the hub when it rings.
- 2 RESET**  
Use a pin to press and hold for about 5 seconds until the hub LED quickly blinks red to reset the hub.
- 3 microSD Card Slot**  
Insert a microSD card to record camera videos locally. Initialize the microSD card within the Tapo app first.  
\*microSD card not included.
- 4 Status LED**  
Indicate the status of your hub.

Notes: Connect up to 4 cameras or video doorbells to a hub.

For more information, please visit <https://www.tapo.com/>  
Specifications are subject to change without notice. All brands and product names are trademarks or registered trademarks of their respective holders.  
©2023 TP-Link