

# DIGITUS VGA UTP Extender Set

DS-53400  
EAN 4016032356721



**VGA Extender over UTP, Set max. 1920x1200, signal extended by 300m, 0-70°C**

Extends the max. length of a VGA signal up to 300 m by using a simple UTP cable between the transmitter and receiver unit.

**Easy and convenient distribution for VGA signals up to 300 m - Place your displays wherever you want without VGA cable limitations.**

- Cat 5 VGA extender consisting of transmitter and receiver unit
- High resolution possible up to 1920 x 1200 pixels
- Supports stereo audio extension
- Dimensions (L x W x H): 110 mm x 75 mm x 25 mm
- Weight: 213 g (transmitter), 208 g (receiver)
- Operating temperature: 0 °C ~ 70 °C

- Operating humidity: 10 % ~ 85 % (non-condensing)
- Power input: 5 V @ 1 A, max 5 W
- HDTV Resolution max.: 1920 x 1200 Pixel, 60Hz
- HDTV Standard: Full HD
- Category: CAT 5e
- Distance: 300 m
- KVM: no
- PoE (Power over Ethernet): no
- Video connection ports: VGA


**Package contents**

- 1x DIGITUS® VGA UTP Extender
- 2 x Power adapter (5 V/1 A)
- 1x User manual

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	20	15.20	60.00	36.50	25.50	55,845.00
Packaging Unit Inside	1	0.76	27.30	17.50	5.50	2,627.62
Packaging Unit Single	1	0.76	27.30	17.50	5.50	2,627.62
Net single without Packaging	1	0.21	11.00	7.50	2.50	0.00

**More images:**



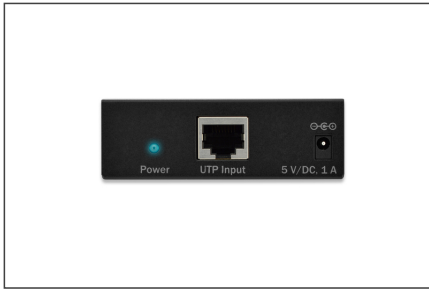

**VIDEO VERLÄNGERUNGEN**  
VIDEO EXTENSIONS

M = Meter / meters

Model	Length
<b>HDMI</b>	
DS-68901 (w/ HDBaseT)	20 M
DS-68901	20 M
DS-68100	20 M
DS-68400 (w/ HDBaseT HD)	20 M / 100 M
DS-68200 (w/ HDBaseT)	100 M
DS-68100	100 M
<b>VGA</b>	
DS-68901	20 M
DS-68200 (w/ HDBaseT)	100 M
DS-68100	100 M
DS-68400 (w/ HDBaseT) (HDMI OUTPUT)	20 M
DS-68440 (w/ HDBaseT) (HDMI OUTPUT)	20 M
<b>DVI</b>	
DS-64901	20 M
DS-64101	20 M