



Datenblatt - Fiche technique - Data sheet


11.04.5586



ROLINE HDMI High Speed Kabel mit Ethernet, HDMI BU - Mini HDMI ST, 0,15m


ROLINE Câble HDMI High Speed avec Ethernet, HDMI F - Mini HDMI M, 0,15m

ROLINE HDMI High Speed Cable + Ethernet, A - C, F/M, 0.15 m

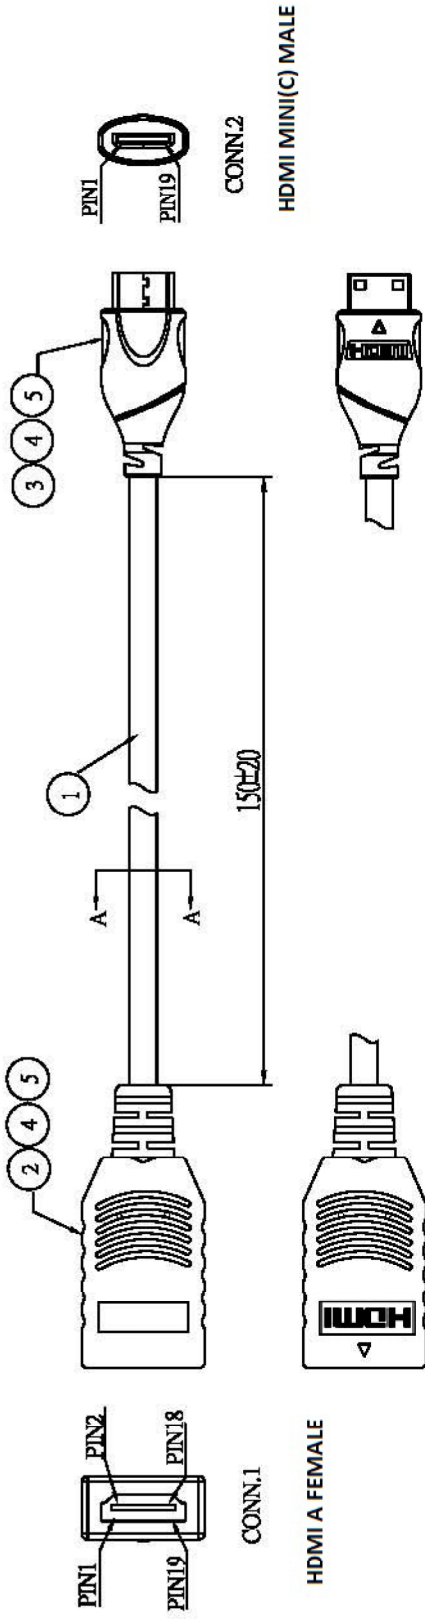

PIN ASSIGNMENT

CONN.1	CONN.2	Signal Name
1	2	TMDS Data2+
2	3	TMDS Data2-
3	4	TMDS Data2 Shield
4	5	TMDS Data1+
5	6	TMDS Data1-
6	7	TMDS Data1 Shield
7	8	TMDS Data0+
8	9	TMDS Data0-
9	10	TMDS Data0 Shield
10	11	TMDS Clock+
11	12	TMDS Clock-
12	13	TMDS Clock Shield
13	14	CBC
14	15	UTILITY
15	16	HOT PLUG DETECT
16	17	ID/CLOCK Ground
17	18	SCL
18	19	SDA
19	20	+5V Power
SHELL	SHELL	



SECTION:A-A

- NOTES:**
1. RoHS & REACH COMPLIANT
 2. TESTING CONDITION :
 RATING TEMPERATURE: -10°C ~ +80°C
 RATING HUMIDITY: 10% ~ 55%
 RATING VOLTAGE: 30V.
 INSULATION RESISTANCE: DC/250V, 10MΩ MIN, 0.01S
 WITHSTAND VOLTAGE: AC/250V 5mA FOR 0.1S.
 CONDUCTOR RESISTANCE: 5Ω MAX.

rotronic

No.	TITLE	DESCRIPTION	Part Number	Note	***	3RD	8	9	10	11	12	13
5	PVC	OVER MOLDING : 40P BLACK										
4	PE	IN MOLDING : MG70 LDFE										
3	CONN	HDMI 19 PIN CM TYPE, Shell Plated Ni + Contact GOLD FLASH										
2	CONN	HDMI 19 PIN A/F TYPE, Shell Plated Ni + Contact GOLD FLASH										
1	CABLE	HDMI CABLE 1.4Rev With Ethernet 34AWG 70.06x5P+34AWG 70.06x4C PVC OD:4.8mm										

ITEM NO. 11.04.5586

DESC. ROLINE HDMI CABLE w/ETHERNET, AF - CM, 0.15M, BLACK

SCALE	NONE	CHECK	DATE
			2013.07.18

UNIT	mm	APPROVED	SHEET
			1 OF 1