


ELECTRICAL TEST:

1. 100% OPEN & SHORT & MIS WIRE TEST
2. CONTACT RESISTANCE: 2 OHM(MAX)
3. INSULATION RESISTANCE: 10M OHM(MIN)
4. HI-POT TEST: DC 300V/10ms

WIRE CONNECTION

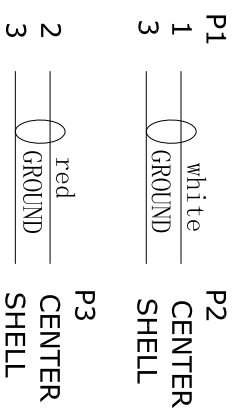

9	RCA F SHELL PLATED:NICKEL WHITE INSULATION	1	pcs	REV.	ECN	DESCRIPTION	DATE	NAME
8	heat-shrinkable tubing ~φ2.0MM~BLACK~	0.01	M	REV.	TOLERANCE INCHES M/M	DESCRIPTION	DATE	NAME
7	TRASPARENT PE ROHS LDPE	4	g	REV.	TOLERANCE INCHES M/M	DESCRIPTION	DATE	NAME
6	45P RED PVC ROHS	6	g	.X	.015	.30	SECOMP TITLE: ROLINE 3.5mm/ 2Xrca (F) Cable, 0.2 m	
5	45P WHITE(N-BHC 2001) PVC ROHS	6	g	.XX	.010	.10		
4	45P BLACK PVC ROHS	6	g	.XXX	.005	.05		
3	RCA F SHELL PLATED:NICKEL RED INSULATION	1	pcs	DRAWN BY	ZHOUWENLONG	P/N :	11.09.4340	
2	DC3.5 M SHELL PLATED:NICKEL THREE TYPE	1	pcs	CHECK BY		SCALE	NONE	DRAWING NO.:
1	NO UL [7/0.127TC*1C+S(28/0.10TC)] *2F OD:2.8*2.8MM BLACK PVC	0.2	m	APPD BY		UNIT	MM	CA1790175
NO	DESCRIPTION	Q'TY	UNIT	DATE	2019.10.22	REV.	AO	1/1