

NOTES:


1. MATERIALS

- 1.1 CABLE: 2.0:7/0.12BCx1P+7/0.12BCx2C+AM+ D(7/0.12BC)+B(16/3/0.12ALM)+WHITE PVC JACKET; OD=4.0±0.2MM  
CABLE PRINTING: USB 2.0 CABLE FULLY RATED 30V 80°C
- 1.2 USB 2.0 A TYPE MALE: SOLDER TYPE, GOLD PLATED CONTACTS, NICKEL PLATED SHELL.
- 1.3 USB 2.0 MICRO B MALE: SOLDER TYPE, GOLD PLATED CONTACTS, NICKEL PLATED SHELL.
- 1.4 ALL HOOD: MOLDED WHITE PVC.

2. ELECTRICAL

- 2.1 100% OPEN AND SHORT TEST.
- 2.2 CONDUCTOR RESISTANCE: 5 OHMS MAX.
- 2.3 INSULATION RESISTANCE: 10 MEGOHMS MIN.
- 2.4 HI-POT: DC300V/0.01S.
- 3. PACKING: SPECIFIC SEE PACKAGING FIGURE.
- 4. ALL MATERIAL BE ROHS AND REACH COMPLIANT.

PIN OUT

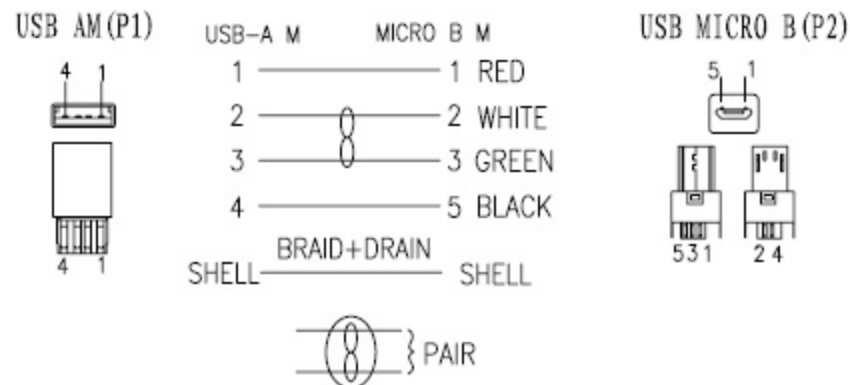

P/N CHART

P/N	L
11.99.8754	800±30MM
11.99.8752	1800±50MM
11.99.8755	3000±70MM

LENGTH TOLERANCE: X. ± 0.5 .X ± 0.2 .XX ± 0.1	SCALE: FREE	CUS. NAME: ROTRONIC	<b>SECOMP</b>		ENG: Harbie
ANGLE TOLERANCE: X' ± 3' .X' ± 1'	UNIT: mm	PRODUCT NO: SEE THE P/N CHART			CUSTOMER NO:
00	NEW ISSUE	2020-08-03	DRAWING NO: 0279	PRODUCT DESCRIPTION: USB 2.0 A PLUG/MICRO B M	APPROVED:
REV.	MODIFY DESCRIPTION	DATE	VERSION: 00	PAGE: 1/1	