
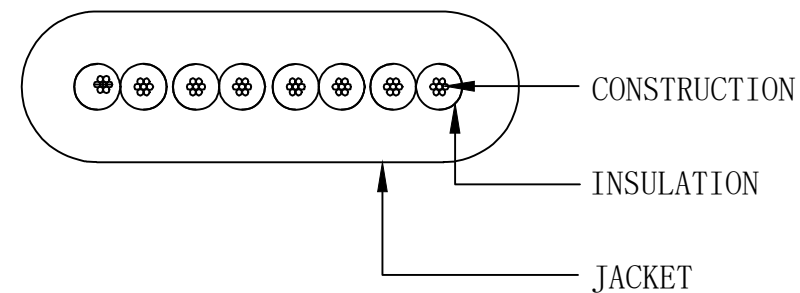


WIRING DIAGRAM



NOTE:

1. 100% OPEN SHORT, MISS WIRE TEST
2. Fluke test  
Test limit: ISO 11801 CHANNEL CLASS EA
3. PRINT WORD: CAT. 6A U/UTP FLAT CABLE 500MHz  
CONFORM TO ISO/IEC 11801 & EN50173-1 & ANSI/TIA-568-C.2
4. ROHS2.0 AND REACH COMPLIANT

MATERIAL LIST

③	OVER MOLD	PVC Colour black	2	
②	CONNECTOR	RJ45 8P8C Unshielded Plug, Pin Gold Plated, Transparent	2	
①	CABLE	(32AWG BC*1P)*4 JACKET:PVC/black OD:T=2.0±0.2mm W=6.2±0.2MM	1	
NO.	PARTS NAME	SPECIFICATION STANDARD	QT' Y	REMARK

ITEM	LENGTH
21.99.0820	500±30mm
21.99.0821	1000±30mm
21.99.0824	1500±50mm
21.99.0822	2000±50mm
21.99.0823	3000±70mm
21.99.0825	5000±70mm

DESC. VALUE CAT 6A U/UTP FLAT PATCH CABLE, BLACK

		NEW	2018-02-22	A
BY	CHK	REVISION RECORD MODIFICATION	DATE	REV.

