


WIRE ADDRESS

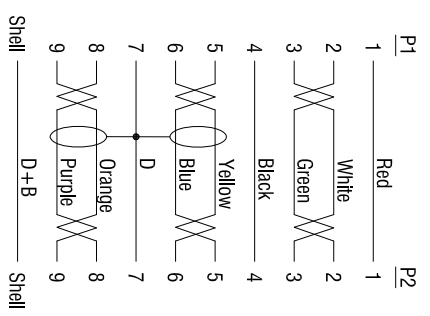

- Electrical Test:
- 1.100% TEST OPEN SHORT MIS-WIRE.
 - 2.CONTACT RESISTANCE:3Ω MAX.
 - 3.INSULATION RESISTANCE:5MΩ MIN.
 - 4.HI-POT:300V DC/10MS.
 - 5.SUPPORT USB 3.2 GEN1 5Gbps

D	45P PVC BLACK	6
C	USB B MALE(Blue Insulator, Nickel Plated, PIN Gold Plated 30 ^u)	1
B	USB A MALE(Blue Insulator, Nickel Plated, PIN Gold Plated 30 ^u)	1
A	UL2725 OR UL20276 (28AWG*1P+ EAM)*2C+28AWG*1P+24AWG*2C+AEB, OD=5.5mm BLACK PVC JACKET.(BC Wire)	1
PRODUCT SPECIFICATIONS		Quantity
NUMBER	1	Unit

VER.A	REVISE	DATE
D		
C		
B		

USB 3.2 Gen 1 Cable, A - B, M/M, black, 3 m

Item 11.02.8871

Draw Sam Date: 2014.12.05

Approval

Duty F16 BOM.NO: 11389

