


WIRE ADDRESS



- Electrical Test:
- 1.100% TEST OPEN SHORT MIS-WIRE.
  - 2.CONTACT RESISTANCE:15Ω MAX.
  - 3.INSULATION RESISTANCE:5MΩ MIN.
  - 4.HI-POT:300V DC/10MS.
  - 5.Real Test Passed 2560\*1600P 60HZ
  - 6.Real Test Not Twinkling, Double Vision and Decolor.

G	45P BLACK PVC		G
F	DVI SHELL(30P BLACK PVC)	2	PCS
E	DVI SPTE	2	PCS
D	FERRITE(17.5*10.5*28.5mm)BLACK	2	PCS
C	Screw : #4-40UNC(Nickel Plated)BLACK MOLDING	4	PCS
B	DVI24+1 MALE (Black Insulator, Nickel Plated)	2	PCS
A	UL2027(28#*1P(CCS) + DAW)*7C+28#*1P(BC) + 28#*2C(BC) + 26#*1C(BC) + ADB, OD=8.5, BLACK PVC JACKET	1	PCS
PRODUCT SPECIFICATIONS			
Item		11.04.5521	
Draw		Make	Date: 2020.03.09
Approval			
Duty		F16	BOM.NO: 13851
Sample NO.			Drawings of 1-(2) Proportion: 1:1 Unit(mm) A4

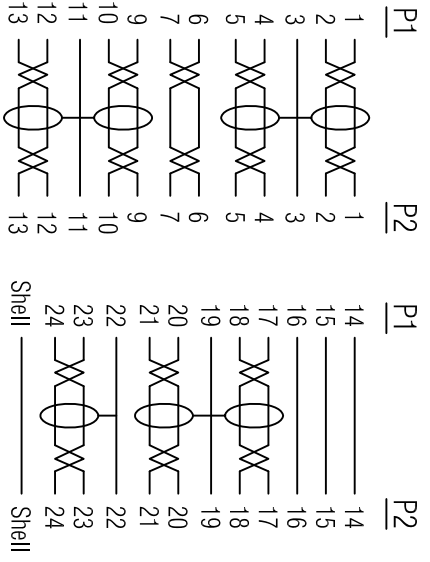