


PIN OUT

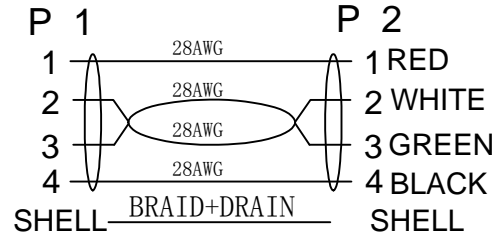

ITEM NO.	LENGTH
11. 99. 8946B	800 ± 20mm
11. 99. 8949B	1800 ± 30mm
11. 99. 8961B	3000 ± 50mm

MATERIAL LIST:

NO.	PARTS NAME	SPECIFICATION STANDARD	QT'Y	REMARK
④	OUTER MOLD	Shore 88A PVC color For Black	2	
③	USB A TYPE	USB A /F Type, The Pin Gold Plating 3u", the shell for Nickel Plating	1	
②	USB A TYPE	USB A /M Type, The Pin Gold Plating 3u", the shell for Nickel Plating	1	
①	CABLE	USB 2.0 28AWG (BC*1P)+28AWG (BC*2C)+AEB B:48# AL-MG E=28# BC JACKET:PVC/Black OD: 3.8±0.2mm	1	

NOTE:

- Electrical test:
 - 100% open short & miss wire test;
 - Insulation resistance:DC 300V 10M Ω ;
 - Contact resistance:5 Ω Max;
 - Dielectric strength:100V AC/Minute, 1mA.
- RoHS 2.0 & REACH compliant
- PRINTING:USB 2.0 CABLE, 28AWG×1P+28AWG×2C

DESC.	VALUE USB 2.0 Cable Type A, M/F, white
-------	--

		NEW	2018-12-05	A
BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.

SECOMP