


WIRE ADDRESS

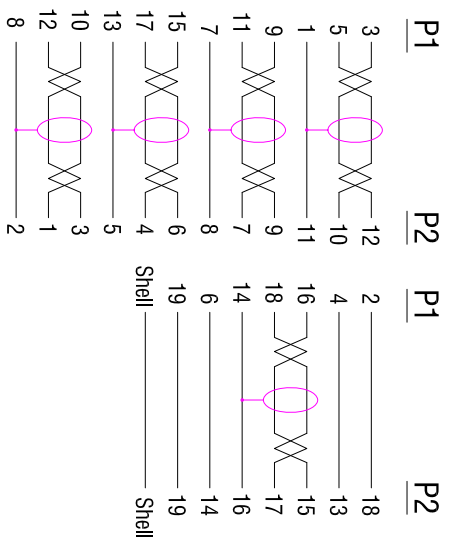

- Electrical Test:
- 1.100% TEST OPEN SHORT MIS-WIRE.
 - 2.CONTACT RESISTANCE:3Ω MAX.
 - 3.INSULATION RESISTANCE:5MΩ MIN.
 - 4.HI-POT:300V DC/10MS.
 - 5.Real Test Passed 3840*2160P 60Hz.
 - 6.Real Test Not Twinkling,Double Vision and Decolor.

E	45P BLACK PVC	G
D	DisplayPor 2P MALE BLACK ABS SHELL	G
C	Mini DP MALE(White Insulator, Nickel Plated)	PCS
B	DisplayPor 20P MALE(Black Insulator, Nickel Plated)	PCS
A	UL20276 (32AWG*1P+D+AM)*5+32AWG*5C+AEB,OD=6.0mm,BLACK PVC JACKET.(BC Wire)	PCS
NUMBER	PRODUCT SPECIFICATIONS	Quantity Unit
1		
2		
4		

ROLINE DisplayPort Cable, DP M - Mini DP M, 2m	
Item	11.04.5635
Draw	Sam Date: 2014.11.29
Approval	
Duty	F16 BOM.NO: 10376
Sample NO.	
Drawings of 1 (1)	Proportion: 1:1
Unit(mm)	
SECOMP	
A4	