

SCART to HDMI

Converter CS 34 L



User Manual

Thank you for purchasing this product. For optimum performance and safety, please read these instructions carefully before connecting, operating or adjusting this product. Please keep this manual for future reference.

Introduction

The Scart To HDMI converter is a universal converter for analog Scart input to HDMI 1080p (60Hz) output. The analog to digital conversion in this module employs 10 bits maximal 162MSPS sampling, black/white level expansion, color transition improvement, dynamic range expansion, blue stretch, auto-detect and auto-convert the composite signal to 1080p(60Hz) output. Making video come alive, delivering the sharpest,most realistic HD visuals available.

Features

- 1.No need to install drivers, portable, flexible, plug and play.
2. Provide advanced signal processing with great precision,colors, resolutions, and details;
3. Support PAL, NTSC3.58. NTSC4.43, SECAM, PAL/M, PAL/N standard TV formats input.
- 4.Support HDMI 1080p or 720p output.

Specification parameters:

SCART input..... PAL, NTSC3.58. NTSC4.43, SECAM, PAL/M, PAL/N


HDMI output..... 1080p/720p

HDMI Output Cable Length.....	Less than 7m AWG26 HDMI Standard Line
SCART Input Cable Length.....	Less than 8m AWG26 SCART Standard Line
Large working current.....	350mA
Specifications of power adapters.....	AC 100V-240V 50/60HZ, DC 5V/1A
Working temperature.....	-10~+55 C
Storage temperature.....	-20~+60 C
Working humidity.....	10-90% RH (no condensation)
Storage humidity.....	5-95% RH (no condensation)
Shell size.....	88.5*57.5*25 (mm)
Weight.....	60 grams

Specifications

1. Input ports: 1X Scart
2. Output ports: 1 x HDMI.

Operation controls and Functions

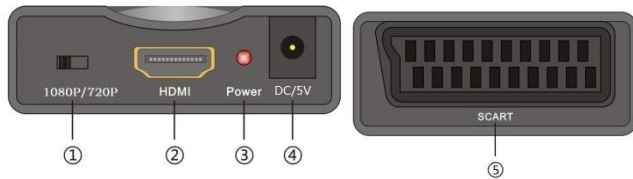

- 1) 1080P/720P Switch: Switch the HDMI output format.
- 2) HDMI output: Connect the HDMI to display.
- 3) LED indicator: When the DC5V power on, the indicator will be light.
- 4) Power: Plug the 5VDC power supply into the unit and connect the adaptor to AC wall outlet.
- 5) SCART Input: Connect the SCART input to your equipment.

Connection steps

1. The HDMI output terminal of HDMI line link converter is connected with the HDMI input terminal of TV.
- 2.SCART input terminal using SCART line link converter is connected to SCART output terminal of DVD
- 3.Use power adapter or USB power supply line to connect power input port to supply power

4.Plug and Play without Installation Driver

5.The resolution of your monitor can be adapted by switching 720/1080P



Contents of the package:

Scart to HDMI converter.....	1PCS
USB Power cord.....	1PCS
User Manual.....	1PCS