


Delock 2 port SATA PCI Express x1 Card with RAID

Description

This PCI Express card by Delock expands the PC by two internal SATA ports. Different devices such as SSDs, hard drives, DVD-drives etc. can be connected to the card.

RAID

When using more than one SATA port, there is the possibility to use different RAID modes.

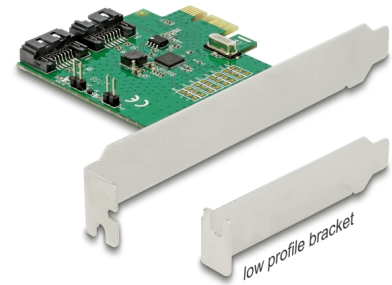

Item no. 90392

EAN: 4043619903924

Country of origin: China

Package: Retail Box

Specification

- Connectors:
 - 2 x SATA 6 Gb/s 7 pin plug
 - 1 x PCI Express x1, V2.0
 - 2 x 2 pin header for LED
- Chipset: Asmedia ASM1061R
- Supports RAID 0, 1, SPAN
- Supports Native Command Queuing (NCQ)
- Supports S.M.A.R.T.
- Supports TRIM
- Supports DevSleep
- Hot Swap
- Bootable


System requirements

- Linux Kernel 3.3 or above
- Windows 7/7-64/8.1/8.1-64/10/10-64/11
- PC with one free PCI Express slot

Package content

- PCI Express card
- Low profile bracket
- LED cable
- Driver CD
- User manual

Images



General

| | |
|-----------------------------|---|
| Supported operating system: | Linux Kernel 3.3 or above Windows 10 32-Bit Windows 10 64-Bit Windows 7 32-Bit Windows 7 64-Bit Windows 8.1 32-Bit Windows 8.1 64-Bit Windows 11 |
|-----------------------------|---|

Interface

| | |
|-----------|--|
| Internal: | 1 x PCI Express x1, V2.0 2 x SATA 6 Gb/s 7 pin plug |
|-----------|--|

Technical characteristics

| | |
|----------------|------------------|
| Chipset: | Asmedia ASM1061R |
| RAID function: | SPAN 0 1 |

Physical characteristics

| | |
|---------------|-------------------------|
| Slot bracket: | Low Profile standard |
|---------------|-------------------------|