



Datenblatt - Fiche technique - Data sheet



**21.99.0310**



VALUE S/FTP-Patchkabel konf. Kat. 5e, grau, 10,0 m

Cordon VALUE Cat.5e S/FTP confectionné, gris, 10,0 m

VALUE S/FTP Patch Cord Cat.5e, grey, 10.0 m

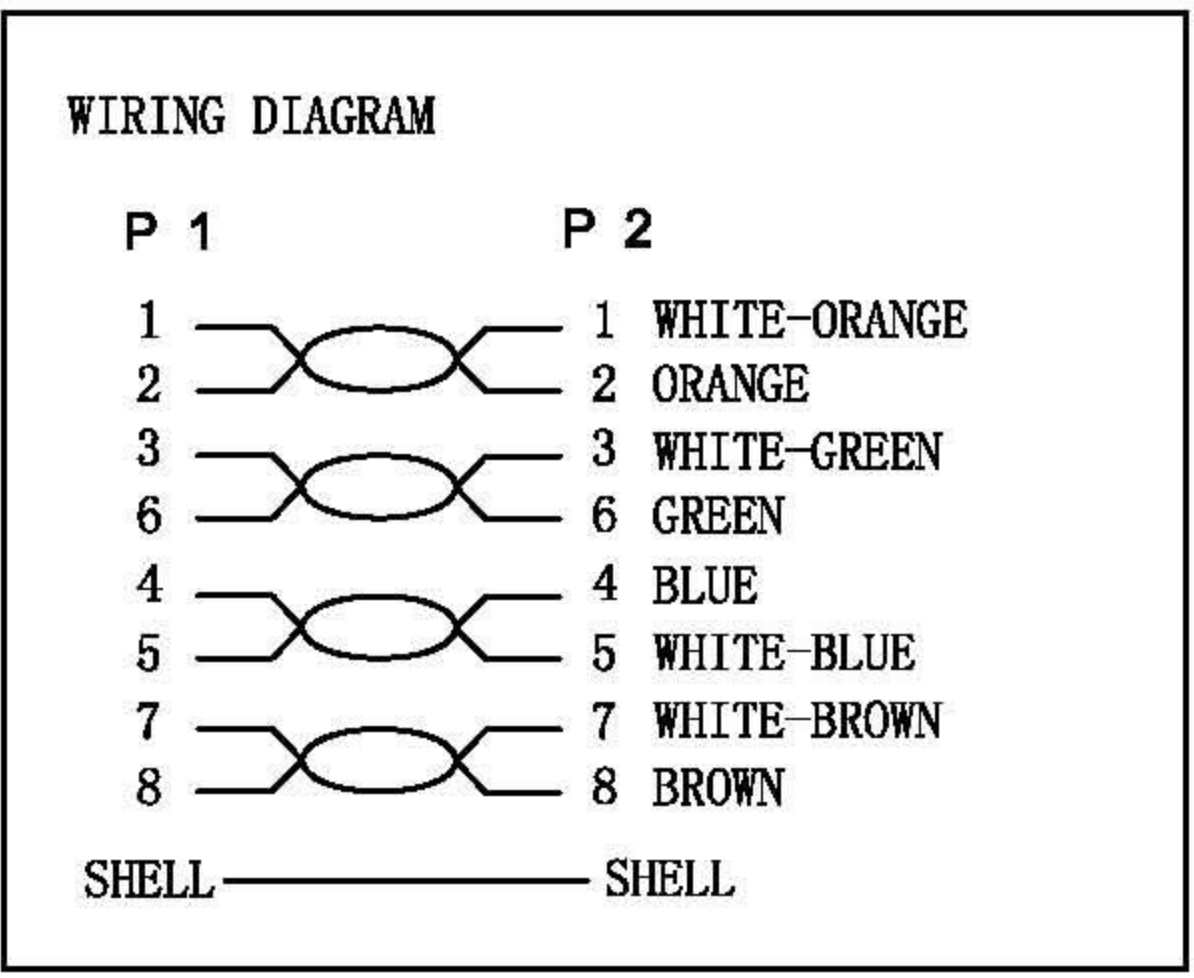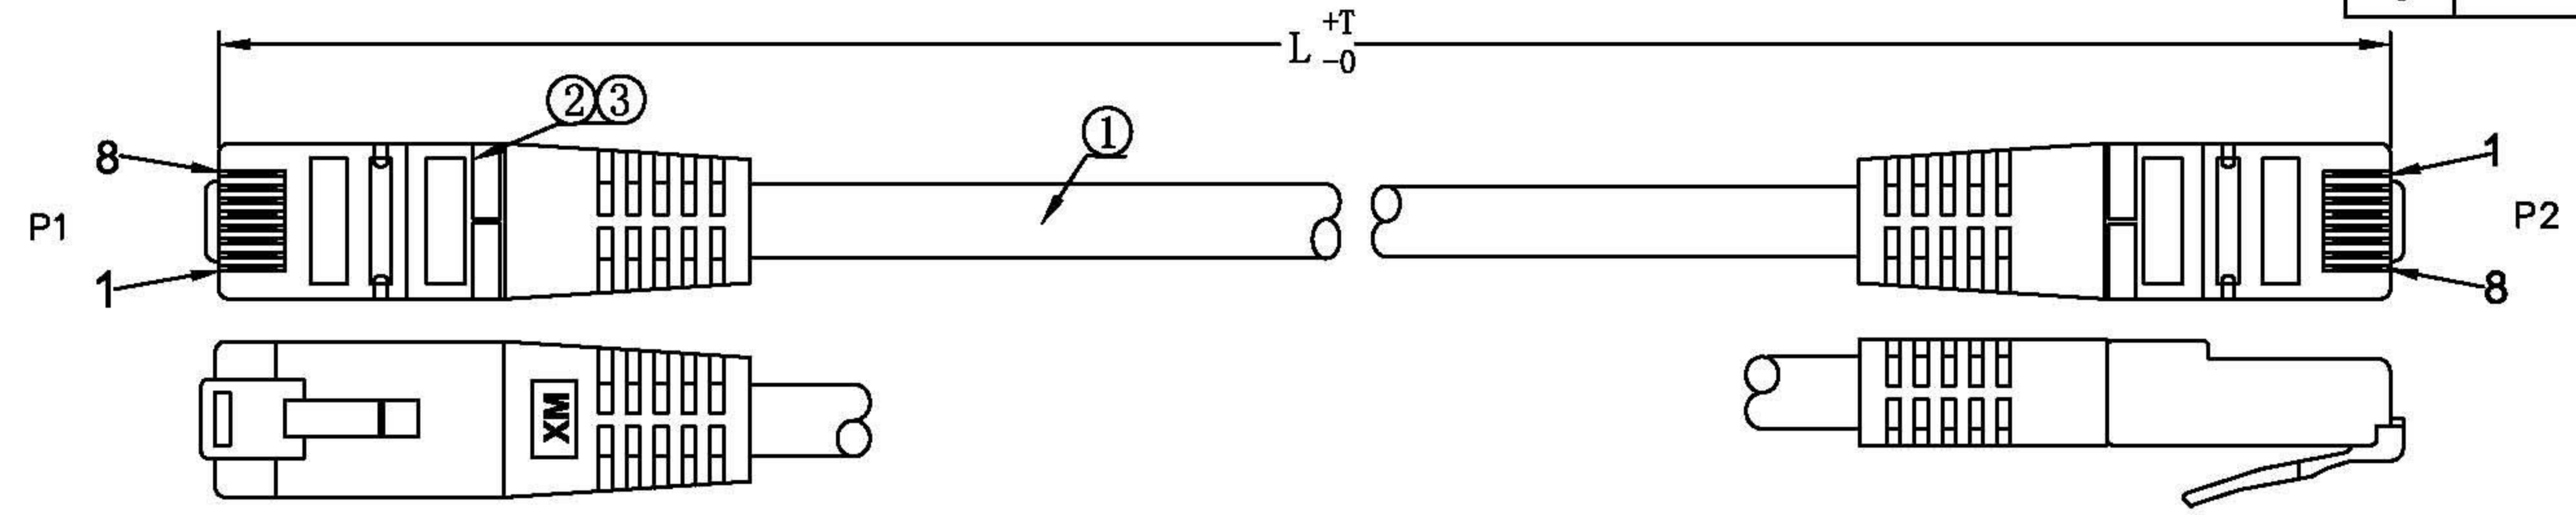

ITEM NO.	LENGTH	XM
21. 99. 0300	0. 5M	0. 5M
21. 99. 0301	1M	1M
21. 99. 0302	2M	2M
21. 99. 0303	3M	3M
21. 99. 0305	5M	5M
21. 99. 0307	7M	7M
21. 99. 0310	10M	10M
21. 99. 0315	15M	15M
21. 99. 0320	20M	20M

**NOTE:**

- 100% OPEN SHORT, MISS WIRE TEST
- PRINT BLACK WORD:  
SFTP CAT. 5E 26AWG×4P PATCH ISO/IEC 11801 & EN 50173 VERIFIED
- REACH and ROHS COMPLIANT
- minimum of the bending radius is 40mm (suitable for all meters)

<b>Rotronic Co., Ltd.</b>			
VALUE S/FTP Patch Cord Cat. 5e, grey			
			ITEM NO
			SEE THE CHART
			UNIT
			MM
	DRAWN BY	CHECK BY	APPO BY
			DATE
BY	CHK	REVISION RECORD MODIFICATION	DATE
			2011-10-25

**MATERIAL LIST**

③	OVER MOLD	PVC COLOR: (Pantone 420C)	2	
②	CONNECTOR	RJ45 8P8C SHIELDED, THE PIN GOLD PLATED 3U"	2	
①	CABLE	SFTP CAT. 5E 26AWG(7/0. 16COPPER CLAD ALUMINUM )*4PAIRS+MYLAR+E(7/0. 16COPPER CLAD ALUMINUM )+AL-FOIL+B(0. 12/4/16)AL-MG CABLE JACKET:PVC/(Pantone 420C) OD=5. 7±0. 2MM	1	
NO.	PARTS NAME	SPECIFICATION STANDARD	QT' Y	REMARK
		NEW	2011-10-25	A
BY	CHK	REVISION RECORD MODIFICATION	DATE	REV.