


DATASHEET

FO Coupling Splice Closure compact

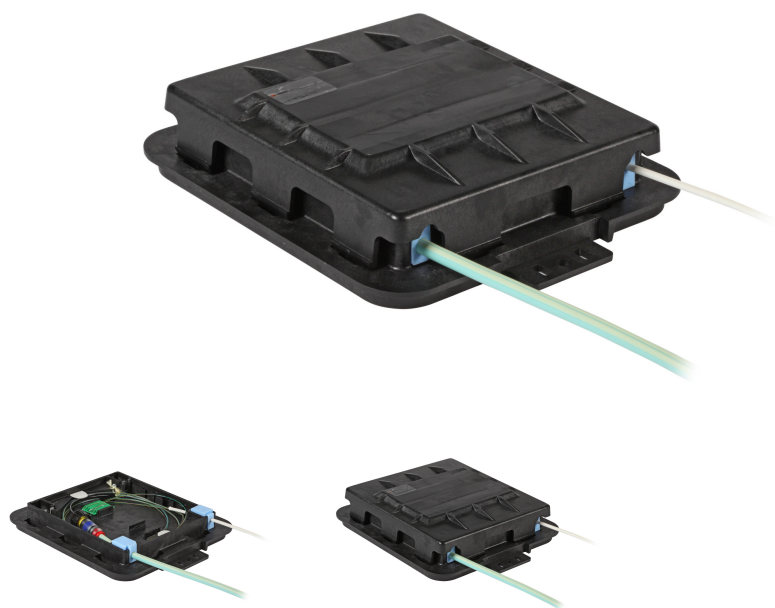

General data

Compact closure, small and flat,
splice holder integrated (delivery unassembled)

Allgemeine Daten

UV resistance	True
Suitable for number of fibres	12
Splice Cassette	integrated
Cable Diameter	4 - 9 mm
Type of closure	Junction closure
Splice Holder	crimp
Number of splice holders	1
In-/Output	4

General data

Direct Burial	True
Colour	black
Degree of protection	IP68
Material	Plastic

This datasheet was created automatically on 18-05-2024 . Technical changes reserved.



DATASHEET

FO Coupling Splice Closure compact

Dimensions

Dimension (LxBxH) | 194 x 232 x 42 mm


Environmental conditions

Temperature range | -40 - 60 °C

Available variants

ArtNr.	Bezeichnung
83205.1	FO Coupling Splice Closure compact

Drawings

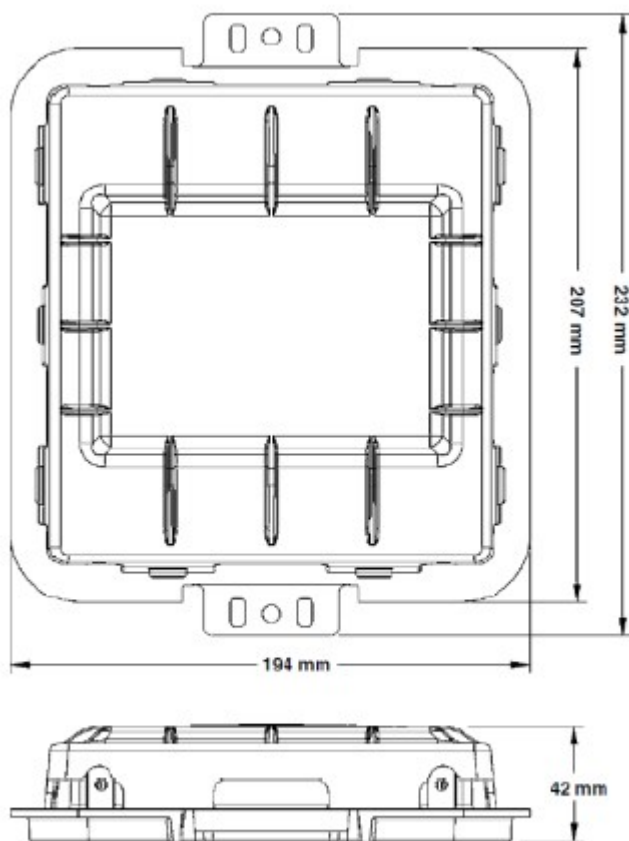

This datasheet was created automatically on 18-05-2024 . Technical changes reserved.

