



Datenblatt - Fiche technique - Data sheet


**21.15.2552**



ROLINE Patchkabel Kat.6 UTP, Component Level, LSOH, schwarz, 2,0 m

Cordon ROLINE UTP Cat.6, LSOH, Component Level, noir, 2,0 m

ROLINE UTP Cable Cat.6 Component Level, LSOH, black, 2.0 m

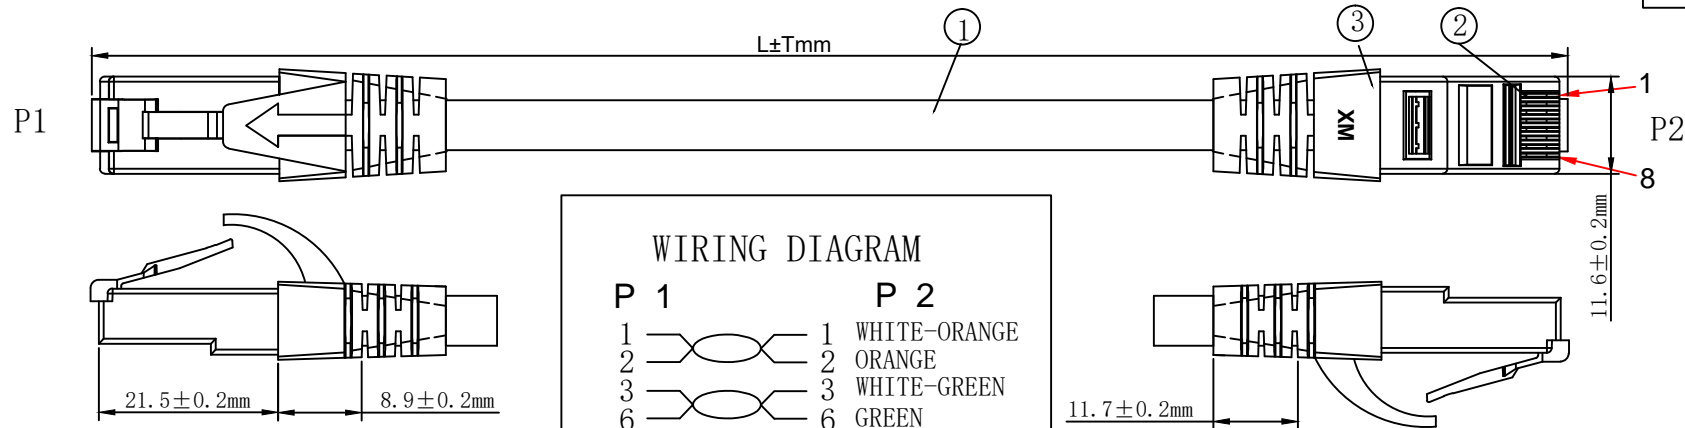

**1. ELECTRICAL TEST:**

- (1). 100% OPEN SHORT & MISS WIRE TEST;
- (2). INSULATION RESISTANCE:DC 250V 20M OHM MIN;
- (3). CONTACTOR RESISTANCE:30 OHM MAX

2.PRINTING:GHMT® roline CAT.6 U/UTP COMPONENT PATCH CORD LSZH 250MHz ISO/IEC 11801 & EN 50173-1 & ANSI/TIA-568-C.2

- 3.100% Component Patch cord Test PASS
- 4.Minimum bending radius:50mm

**MATERIAL LIST**

⑥	LABEL	NO DRY GLUE LABEL	1PCS	
⑤	MINI TIE	PE MINI TIE(POSSESS METAL)	2PCS	
④	POLYETHYLENE BAG	POLYETHYLENE BAG	1PCS	
③	OVER MOLD	88A PVC black	2PCS	
②	CONNECTOR	RJ45 8P8C' S UNSHIELDED PIN GOLD PLATED 3u",Transparent RED	2PCS	
①	CABLE	U/UTP CAT.6 24AWG (BC*1P)*4+CROSS + JACKET LSOH OD=6.0±0.2MM	1PCS	
NO.	PARTS NAME	SPECIFICATION STANDARD	QT' Y	REMARK

COLOUR:black (PANTONE:black 3C)		
ITEM NO.	LENGTH(L)	TOLERANCE(T)
21. 15. 2945	300mm	±10mm
21. 15. 2550	500mm	±15mm
21. 15. 2551	1000mm	±30mm
21. 15. 2554	1500mm	±45mm
21. 15. 2552	2000mm	±60mm
21. 15. 2553	3000mm	±90mm
21. 15. 2555	5000mm	±150mm
21. 15. 2556	7500mm	±210mm
21. 15. 2557	10000mm	±300mm
21. 15. 2558	15000mm	±450mm
21. 15. 2559	20000mm	±600mm

ITEM NO.	21. 15. 2945	21. 15. 2550	21. 15. 2551	21. 15. 2552	21. 15. 2553
21. 15. 2554	21. 15. 2555	21. 15. 2556	21. 15. 2557	21. 15. 2558	21. 15. 2559
DESC.	ROLINE UTP PatchCord CAT. 6, LSOH, Comp. Level, black				

		NEW		2016-10-20
BY	CHK	REVISION RECORD MODIFICATIONS		A
			DATE	REV.

SECOMP