


RoHS Compliant

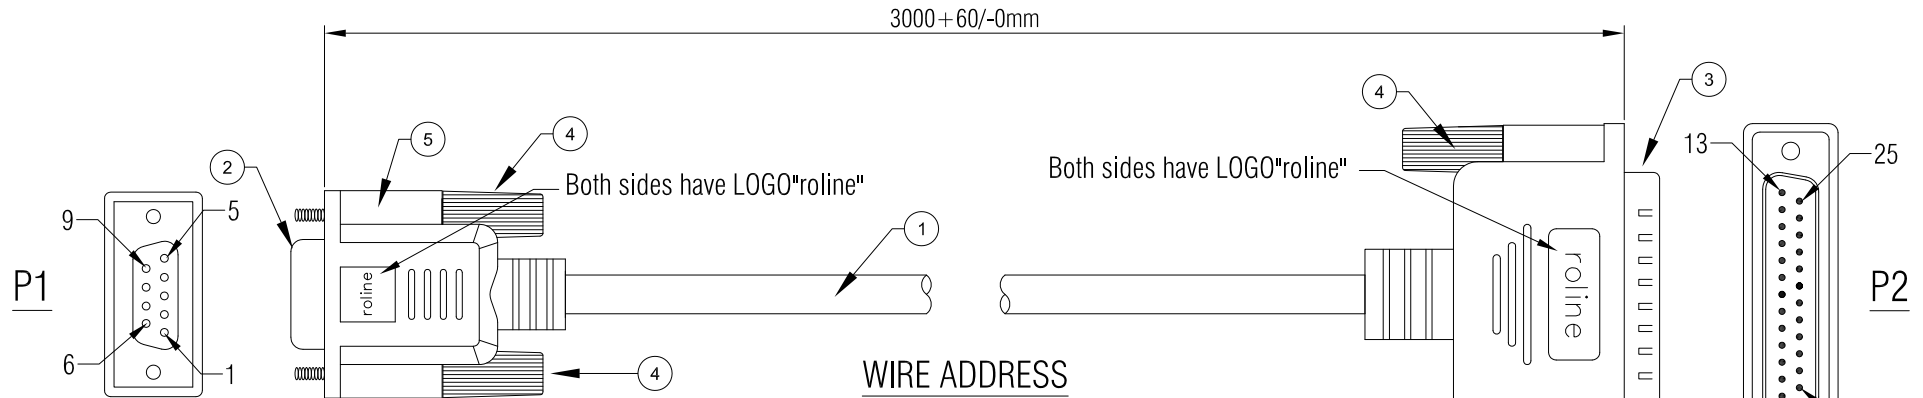

**WIRE ADDRESS**

P1	P2
1	8
2	3
3	2
4	20
5	7
6	6
7	4
8	5
9	22
Shell	Shell

**Electrical Test:**

- 1.100% TEST OPEN SHORT MIS-WIRE.
- 2.CONTACT RESISTANCE:5Ω MAX.
- 3.INSULATION RESISTANCE:5MΩ MIN.
- 4.HI-POT:300V DC/10MS.

5	45P PVC BEIGE		G
4	Screw:#4-40UNC(Nickel Plated,Beige)	4	PCS
3	DB 25P MALE(Black Insulator, Nickel Plated)	1	PCS
2	DB 9P FEMALE(Black Insulator, Nickel Plated)	1	PCS
1	NON-UL 30AWG*9C+AE,OD=5.0mm BEIGE PVC JACKET.	1	PCS
NUMBER	BOM.NO	PRODUCT SPECIFICATIONS	Quantity Unit

ROLINE Modem Cable, DB9 F - DB25 M, 3 m

Item	11.01.4530	
Draw	Andi	Date: 2022.07.27
Approval		
Duty	F16	BOM.NO:

**SECOMP**