

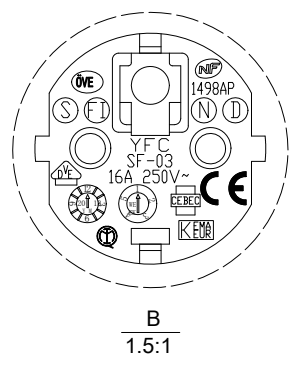

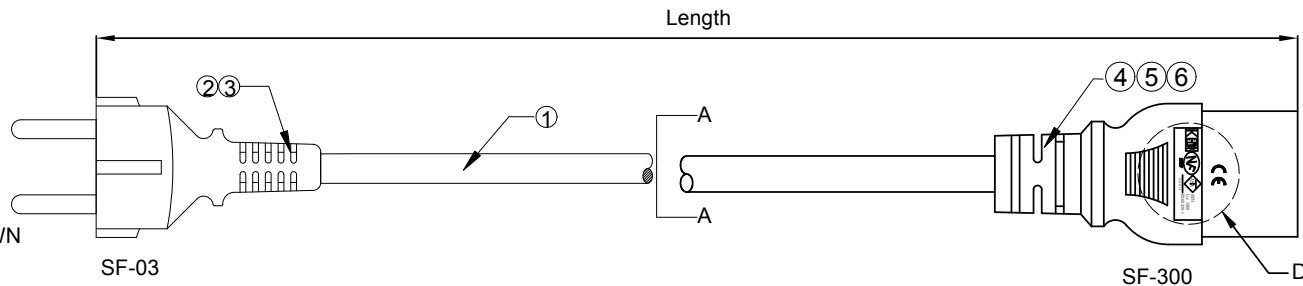
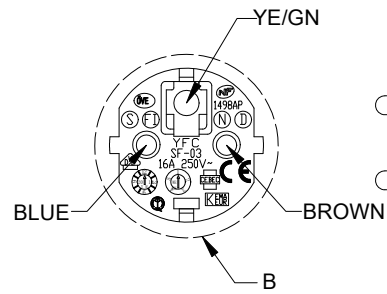
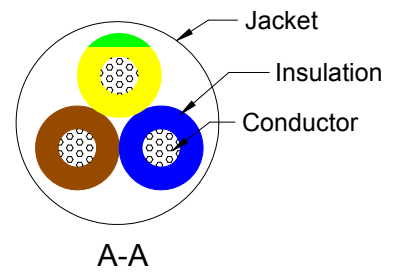



MOLDING:
SF-03
SF-300

DATE	REV.	REVISION	DRAFTING	CHECKED
2021/05/21	A/0	Initial	Bob.Chen	



WIRE MARKING (NO.128)
 + S + S + S KEMA-KEUR 972 NF-USE 1345
 IEMMEQU H05VV-F 3G1.5MM² V-75 300/500V ORDINARY DUTY NSW17436 YFC BON-EAGLE



PINOUT		
SF-03	WIRE	SF-300
E	YE/GN	E
L	BROWN	L
N	BLUE	N

Item	Color	RAL NO. (similar to)	Length
AK5410	BLACK	RAL9011	500 ⁺¹⁵ ₋₁₀
AK5411	BLACK	RAL9011	1500±20
AK5412	BLACK	RAL9011	2000±20
AK5147	BLACK	RAL9011	1000 ⁺¹⁵ ₋₁₀
AK5148	BLACK	RAL9011	5000±30
AK5022	BLACK	RAL9011	3000±30

Polarity and Conduction and Penetration Test	
Dielectric Voltage Withstand Test : 2000V / 1 Sec	
Electrical Performance (20°C)	
Item	Parameter
Conductor Resistance	≤ 13.3Ω/1000m
Voltage Rating	AC 300V/500V

⑥	Molding	40P PVC BK	A/R
⑤	Housing	IEC320 C-19 triple insert (SF-300) inner frame black	1PC
④	Terminal	SF-300 IEC320(C-19) three-hole female terminal, 14-18AWG wire brass color	3PCS
③	Molding	50P PVC BK	A/R
②	Terminal	European standard, black french connector SF-03.	1PC
①	CABLE	H05VV-F 3GX1.5mm ² BK PVC	A/R

Unless specified on the drawing, tolerances are per the follows:

X. ±0.20 X° ±3
 .X ±0.10 .X° ±0.3
 .XX ±0.05



DRAW. NO	YFAC-S210107	TITLE	H05VV F1.5mm ² *3C SF-03 TO SF-300 BK CABLE ASS'Y		
CUSTOMER	ACT	DRAW	Bob.Chen	DATE	2021.05.21
CUST' R P/N	--	CHECK		DATE	
SCALE	NONE	APPROVED		SHEET	1 of 1
UNIT	mm				

No.	TITLE	DESCRIPTION	Q'TY
Cable Spec NO.	--	Part Number	--

Note RoHS2.0 Reach GP HF Other

