


WIRING DIAGRAM

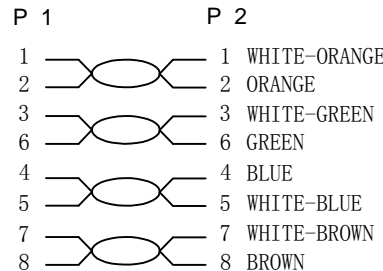

1. ELECTRICAL TEST:

- (1). 100% OPEN SHORT & MISS WIRE TEST;
- (2). INSULATION RESISTANCE:DC 250V 20M OHM MIN;
- (3). CONTACTOR RESISTANCE:30 OHM MAX

2. PRINTING:CAT5E U/UTP 4x2x24AWG/7 PVC ISO11801 & EN50173 & ANSI/TIA568C.2

3. FLUKE CHANNEL LINK TEST

TEST LIMIT:ISO11801 Channel Class D

MATERIAL LIST

⑥	LABEL	PE BAG	1PCS	
⑤	MINI TIE	PE MINI TIE(POSSESS METAL) COLOUR(RAL 7035)	2PCS	
④	POLYETHYLENE BAG	NO DRY GLUE LABEL	1PCS	
③	OVER MOLD	PVC COLOR GRAY RAL 7035	2PCS	
②	CONNECTOR	RJ45 8P8C UNSHIELDED PIN GOLD PLATED 3U"	2PCS	
①	CABLE	UTP CAT. 5E 24AWG(CCA)*4PAIRS JACKET:PVC/GRAY (RAL 7035) OD:5.4±0.2mm	1PCS	
NO.	PARTS NAME	SPECIFICATION STANDARD	QT' Y	REMARK

ITEM NO.	LENGTH	TOLERANCE (T)
21.99.0500	0.5M	+30 -15mm
21.99.0501	1M	± 30mm
21.99.0502	2M	± 45mm
21.99.0503	3M	± 60mm
21.99.0505	5M	± 90mm
21.99.0507	7M	± 150mm
21.99.0510	10M	± 210mm
21.99.0515	15M	± 300mm
21.99.0520	20M	± 450mm
21.99.0530	30M	± 600mm

ITEM NO.	21.99.0500	21.99.0501	21.99.0502	21.99.0503	21.99.0505
	21.99.0507	21.99.0510	21.99.0515	21.99.0520	21.99.0530
DESC.	VALUE U/UTP PatchCord CAT. 5E, PVC, Comp. Lev. , grey				



BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.

NEW
2018-03-21
A