

NOTE:

1. Electrical test:

- (1). 100% open short & miss wire test;
- (2). Insulation resistance: DC 200V 10M ohm;
- (3). Contact resistance: 3 ohm;
- (4). Dielectric strength: 300V AC/Sec, 2mA.

2. Support Ultra HD 8K 7680×4320@60Hz, 10K 10240×4320@30Hz, 4K 3840×2160@120Hz, Support dynamic HDR


3. RoHS 2.0 and REACH Compliant

4. Storage temperature : -20°C~+75°C

5. Operation temperature: -10°C~+60°C

6. Marking: Ultra High Speed HDMI™ Cable with Ethernet E***** AWM STYLE 20276 80°C 30V VW-1

PIN OUT

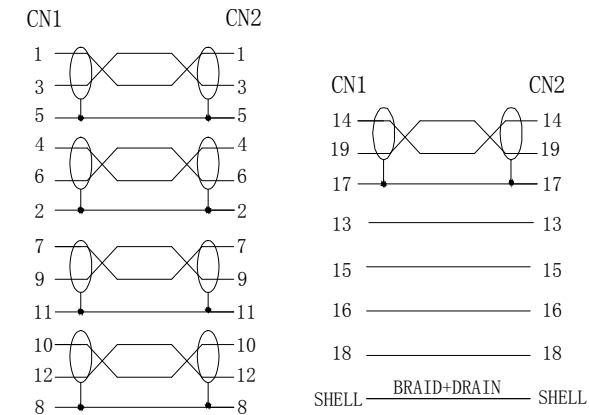

MATERIAL LIST:

⑤	HOUSING	ABS color for silvery	2PC	
④	OVER MOLDING	PVC 85A BLACK	2PC	
③	CONNECTOR SHIELD	Iron shell shield	2PC	
②	CONNECTOR	19P A/M connector Crimping Type, Black insulation The Pin Gold Plating, the shell Gold plating	2PC	
①	CABLE	HDMI 2.1 (28AWG BC*1P+E+A+MYLAR)*5+(28AWG BC)*4C+AEB JACKET: PVC/BLACK OD: 7.5±0.2mm	1PC	
NO.	PARTS NAME	SPECIFICATION DESCRIPTION	QT'Y	REMARK

ITEM No.	LENGTH
11.99.5943	3000±50

DESC. VALUE HDMI UHD Cable, 10K@30HZ, Dynamic HDR, M/M

NEW

2020-04-09

A

BY CHK REVISION RECORD MODIFICATIONS DATE REV.

SECOMP