

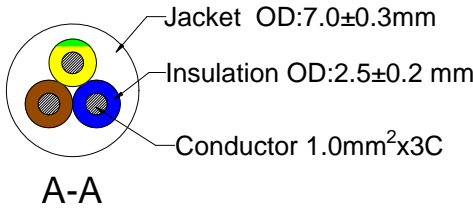
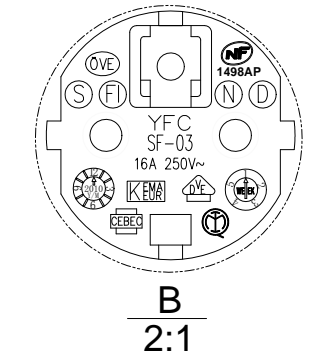


1	2
CUSTOMER NAME	
CUSTOMER Part No.	

7	8	9	10
DATE	REV	DESCRIPTION	BY
2022.09.21	A/0	NEW	XYH

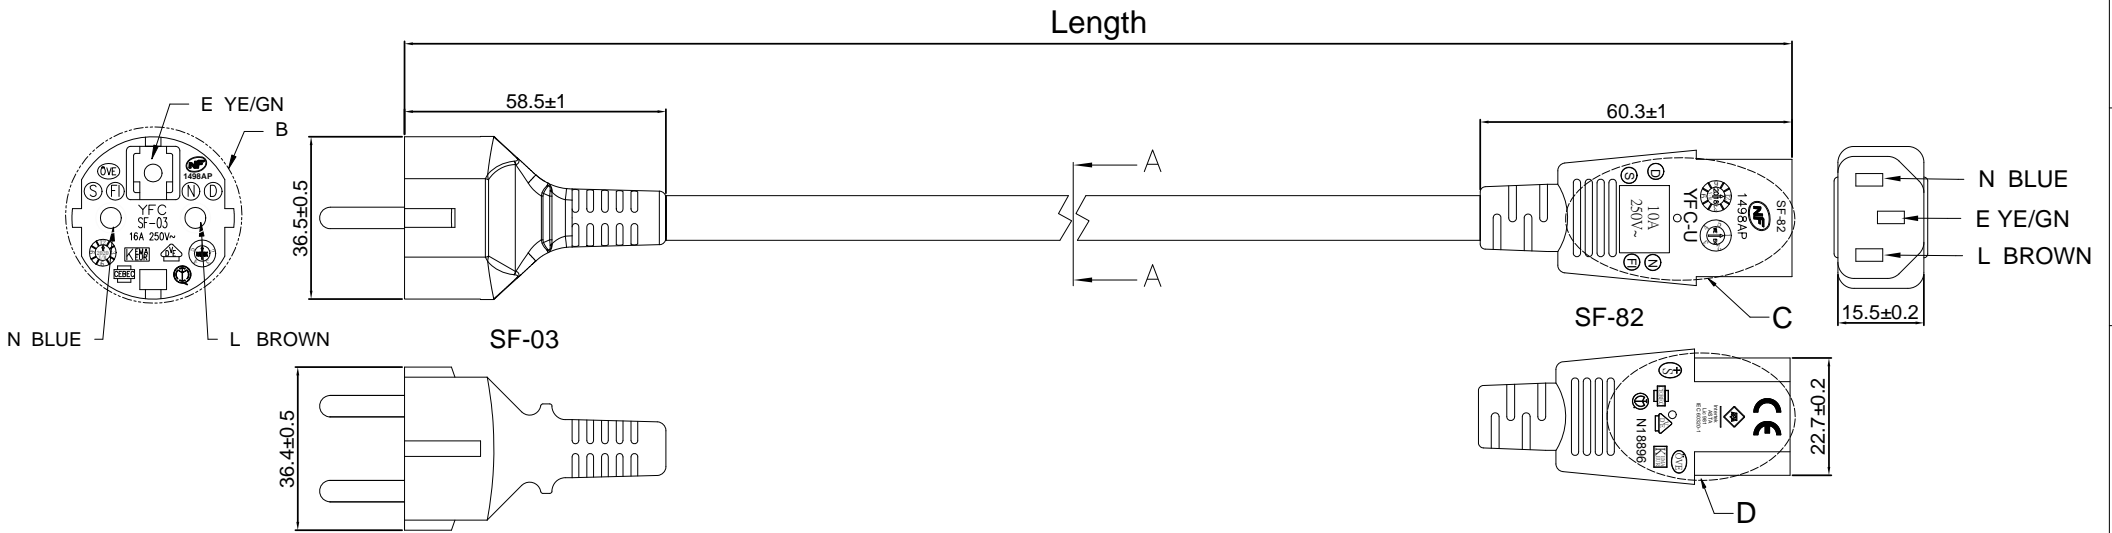

Customer Item No	Cable Color	Molding Color	Length (mm)
AK5009	IV017	IV017	2500±30
AK5017	Black	Black	2500±30

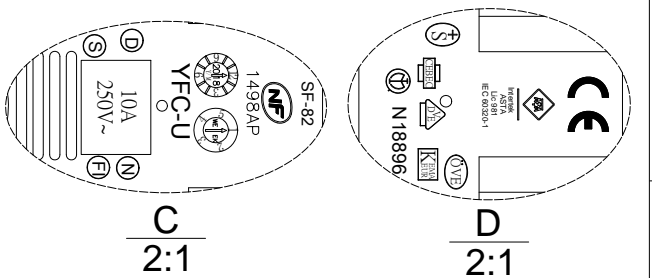

PINOUT			
SF-03		SF-82	WIRE
E		E	YE/GN
L		L	BROWN
N		N	BLUE

REMARKS:

- 1.POLARIZATION AND CONTINUITY TEST
- 2.DVW TEST:2000VAC,1S
- 3.PLUG(SF-03) MOLDING PVC RATED POWER:250V 16A
- 4.CONNECTOR (SF-82) MOLDING PVC RATED POWER:250V 10A
- 5.WIRE: H05VV-F 3G 1.0mm²x3C RATED VOLTAGE:300V/500V
- 6.CE LOGO SIZE: 5.0mm

WIRE MARKING: (Hollow) NO.133		++ ++ ++ KEMA-KEUR (S) (N) (D) (F) Δ CEBC 972 <VDE> NF-USE 1345 IEMMEQU H05VV-F 3G1.0MM² V-75 300/500V ORDINARY DUTY NSW17436							
Key Size	△	3RD	⊕						
Length (mm)	Tolerance								
	Critical	Normal	General	Part No.	AK5009, AK5017				
0-15	±0.05	±0.10	±1.0	Description	H05VV-F 3G 1.0mm²x3C SF-03 TO SF-82 CABLE ASS'Y				
15-60	±0.10	±0.20		UNIT	mm	APPROVAL	CHECKER	DRAWER	
60-150	±0.15	±0.35	±1.5	PAGE	1/1	CQ	YB	XYH	
150-350	±0.20	±0.50		Draw.No.					
350-1000	±0.40	±0.65	±2.0						