


PIN OUT

CN1 (568B)		CN2 (568B)	
WHITE-ORANGE	1	1	WHITE-ORANGE
ORANGE	2	2	ORANGE
WHITE-GREEN	3	3	WHITE-GREEN
GREEN	6	6	GREEN
BLUE	4	4	BLUE
WHITE-BLUE	5	5	WHITE-BLUE
WHITE-BROWN	7	7	WHITE-BROWN
BROWN	8	8	BROWN

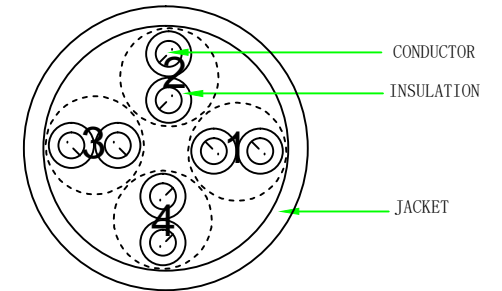

NOTE:


1. Fluke Channel Test ISO 11801 channel Class Ea
2. RoHS2.0 AND REACH compliant
3. Electrical test: 100% open short & miss wire test;
4. OPERATING TEMPERATURE: -10°C ~ 60°C
5. Print word: CAT6A U/UTP 4x2x32AWG/7 LSZH ISO11801 & EN50173 & ANSI/TIA568C.2
6. Minimum of the bending radius is 30mm (Suitable for all meters)

MATERIAL LIST

③	CABLE	CAT. 6A U/UTP CABLE (32AWG BC*1P)*4+JACKET:LSZH/BLUE, OD:3.4±0.2mm	1	
②	Over mold	48P PVC/BLUE	2	
①	Plug	RJ45 8P8C Unshielded Plug, PIN GOLD PLATED 3u", TRANSPARENT	2	
NO.	PARTS NAME	SPECIFICATION STANDARD	QT' Y	REMARK

Color: Blue(Pantone 647C)	
ITEM No.	LENGTH
21.15.3940	150±5mm
21.15.3941	300±10mm
21.15.3942	500±30mm
21.15.3943	1000±30mm
21.15.3944	1500±50mm
21.15.3945	2000±50mm
21.15.3946	3000±70mm
21.15.3947	5000±70mm

Minimum of the bending radius 30mm



DESC. ROLINE Cat.6A UTP Patch Cord, LSZH, Slim, Blue

SECOMP

		NEW	2019-06-17	A
BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.