




# AK5080

PC1025

**CABLE REQUIREMENTS:**

**Colour:** BLACK  
**Type:** 3 Core 1.00mm<sup>2</sup> H05VV-F (European Approved)  
**Conductor Colour Codes:**  
 Earth (Green & Yellow)   
 Neutral (Blue)   
 Live (Brown) 

**Complete Powerlead Rated:** 10A/250V

**PLUG / END A REQUIREMENTS:**


**Type:** Free End  
**Colour:**  
**Rating:**  
**Reference:** See Further comments / Terminations below.

**CONNECTOR / END B REQUIREMENTS:**

**Type:** SW905  
**Colour:** BLACK  
**Rating:** 10A  
**Reference:** C13 IEC Lock Connector (European Approved)

**Free End Overall Strip Lengths (Includes Terminations)**

Live = 50mm (+/- 2mm)  
 Earth = 50mm (+/- 2mm)  
 Neutral = 50mm (+/- 2mm)

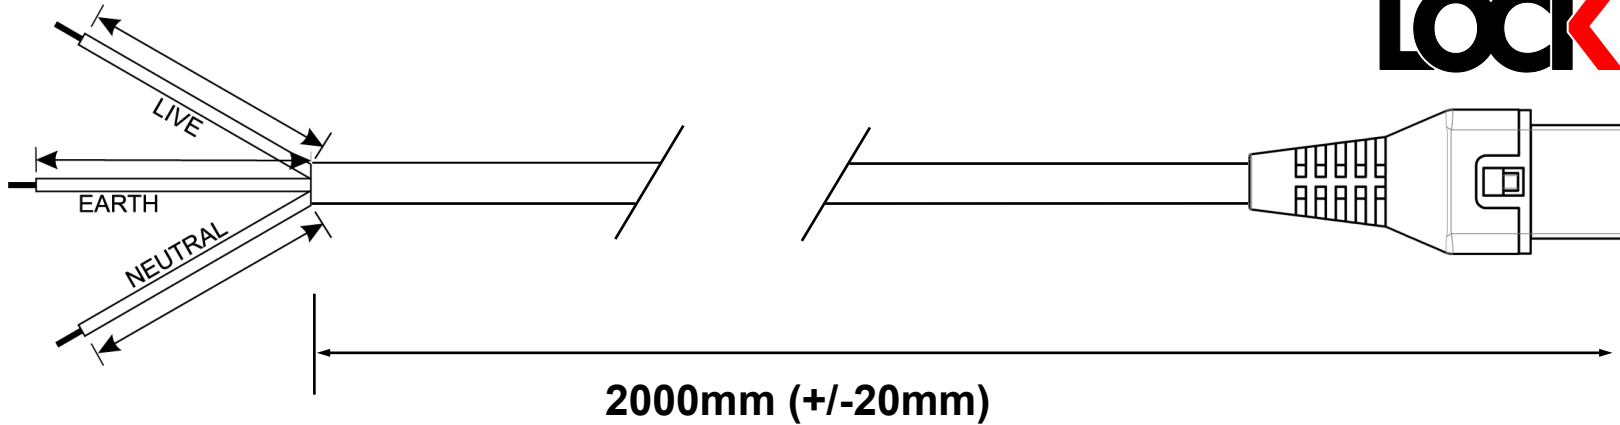

**EXTRA REQUIREMENTS:**

PACKAGING OUTER .....100  
 PIN PROTECTING COVER .....NO  
 WIRING INSTRUCTIONS .....NO  
 PRE-SHIPMENT INSPECTION REQUIRED....NO

**COMMENTS:**  
 NO knock out cover over red slide bar

**CHANGE MANAGEMENT:**

**HANKING**

**None**

**TERMINATIONS / FURTHER COMMENTS:**

**LIVE / BROWN**

**Type:** Stripped End  
**Size:** 6mm

**NEUTRAL / BLUE**

**Type:** Stripped End  
**Size:** 6mm

**EARTH / GREEN & YELLOW**

**Type:** Stripped End  
**Size:** 6mm