



item No.	length	Inner carton packing quantity
11.99.4341	1.5m±20mm	50pcs
11.99.4345	5m±30mm	30pcs

SPECIFICATION

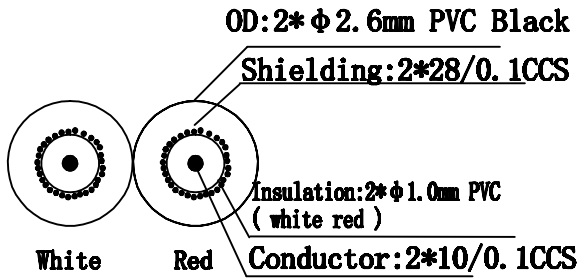

WIRING DIAGRAM

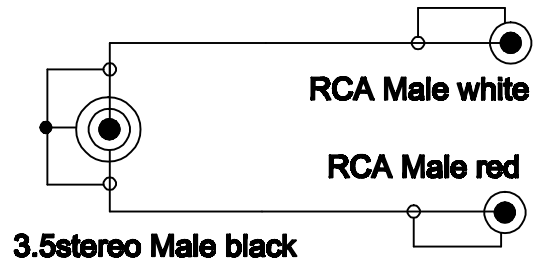

6	CONNECTORS2	RCA Male Nickel Plated	2PCS
5	MOULDED3	PVC 45P Black	1*10g
4	MOULDED2	PVC 45P red	1*10g
3	MOULDED1	PVC 45P white	1*10g
2	CABLE	AUDIO CABLE Black	L
1	CONNECTORS1	3.5mm Stereo Male Nickel	1PCS
NO.	PARTS NAME	SPECIFICATION STANDARD	QTY

- TESTING: 100% OPEN AND SHORT AND MISWIRE TEST.
- INSULATION RESISTANCE: 100Meg Ohm.
- WITHSTAND VOLTAGE: 300 VOLTS RMS, 1 MINUTE.
- OPERATING TEMPERATURE RANGE: -20°C TO + 75°C.
- 100% RoHS & REACH COMPLIANT.

DRAWING APPROVED _____ DATE: _____
 SAMPLE APPROVED PER _____ DATE: _____
 DRAWING SPECIFICATIONS

NAME	VALUE 3.5mm (M) - Cinch (2x M) Cable, black	SECOMP
SCALE	NONE	
SHEET	1/1	
DIMENSIONAL TOLERANCES UNLESS OTHERWISE NOTED	ITEM NO.	ENG. DATE
.X ±	.XX ±	11.99.4341/11.99.4345
.XXX ±	ANGLES ±	CHECKED DATE
REV. 00	CUS. REV.	DRAWING NO. MW-SIN -006
		APPROVED DATE

01	NEW ISSUE	2018.03.22
REV.	MODIFY DESCRIPTION	DATE