


# ROLINE USB 3.2 Gen 2x2 Cable, PD (Power Delivery) 20V5A, with Emark, C-C, M/M, 20 Gbit/s, black, 1 m

|                           |               |
|---------------------------|---------------|
| <b>Product No.</b>        | 11.02.9071    |
| <b>Manufacturer</b>       | ROLINE        |
| <b>Manufacturer No.</b>   | 11.02.9071    |
| <b>EAN (single piece)</b> | 7630049619258 |

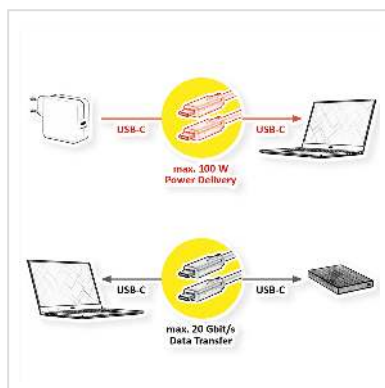

**USB 3.2 Gen 2x2 cable with up to 20 Gbit/s speed mode that uses a more efficient data encoding and will deliver more than twice the effective data through-put performance of existing, fully backward compatible USB connectors and cables.**

- High quality USB 3.1 / USB 3.2 Gen 2x2 cable with improved shielding
- With the reversible Type C connectors at both ends
- Gold-plated contacts for low wear at high plugging cycles
- Suitable for data transfer rates of up to 20 Gbit/s
- Supports USB Power Delivery to 20V / 5A

Note: According to the current specifications of USB.org we have adapted the technical data of our USB 3 products. The new designation for the already known USB specifications has been changed to USB 3.2 Gen 1 (formerly USB 3.0 / USB 3.1 Gen 1) and USB 3.2 Gen 2 (formerly USB 3.1 / USB 3.1 Gen 2).

## Technical specifications

|                  |                                      |
|------------------|--------------------------------------|
| Manufacturer     | ROLINE                               |
| Product group    | Cable                                |
| Product type     | USB 3.2 Cable                        |
| Colour           | black                                |
| Length           | 1 m                                  |
| Transfer quality | USB 3.2 Gen 2x2 SuperSpeed 20 Gbit/s |

|                                    |   |
|------------------------------------|---|
| Connection ports                   | USB Type C (USB-C) Male / USB Type C (USB-C) Male |
| Side 1 Connector Type              | USB Type C (USB-C)                                |
| Side 1 Connector Gender            | Male  |
| Side 2 Connector Type              | USB Type C (USB-C)                                |
| Side 2 Connector Gender            | Male  |
| Area of application                | External  |
| Supported charging technology      | USB-PD - USB Power Delivery                       |
| Cable shielding                    | Screened  |
| Hand locking screws                | No  |
| Weight                             | 44.1 g  |
| Height of packaging (single piece) | 20 mm   |
| Width of packaging (single piece)  | 50 mm   |
| Depth of packaging (single piece)  | 50 mm   |
| Package weight (single piece)      | 0.05 kg   |