


# Data Sheet

## PIGTAIL

### FEATURES

- Loss optical performance to meet data center power budgets
- Comply with IEC, EIA/TIA or Telecordia
- 100% optical inspection and testing
- Low insertion loss and high return loss
- Available in different lengths and colors
- LSZH Environmental Space
- Operating Temperature range of -10 °C to +60 °C

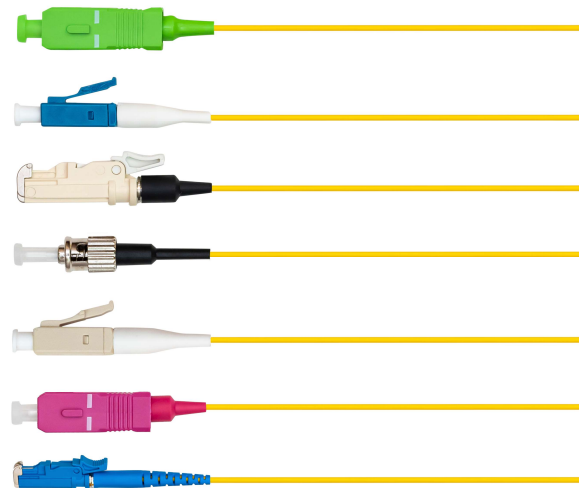

### SINGLEMODE

Fiber Grade	G652D G657A G657B
Fiber Mode	OS2 9/125µm
Wavelength	1310/1550nm
Insertion Loss	≤0.3dB UPC
Return Loss	≥50dB UPC - ≥60dB APC
Fiber Count	Simplex
Cable Diameter	0,9 mm
Cable Jacket	LSZH
Operating Temperature	-20~70°C
Storage Temperature	-40~80°C

### MULTIMODE

Fiber Grade	OM1-OM2-OM3-OM4
Fiber Mode	50/125µm
Wavelength	850/1300nm
Insertion Loss	≤0.3dB UPC
Return Loss	≥30dB
Fiber Count	Simplex
Cable Diameter	0,9 mm
Cable Jacket	LSZH
Operating Temperature	-20~70°C
Storage Temperature	-40~80°C