


PIN OUT

| CN1 (568B)   |   | CN2 (568B) |              |
|--------------|---|------------|--------------|
| WHITE-ORANGE | 1 | 1          | WHITE-ORANGE |
| ORANGE       | 2 | 2          | ORANGE       |
| WHITE-GREEN  | 3 | 3          | WHITE-GREEN  |
| GREEN        | 6 | 6          | GREEN        |
| BLUE         | 4 | 4          | BLUE         |
| WHITE-BLUE   | 5 | 5          | WHITE-BLUE   |
| WHITE-BROWN  | 7 | 7          | WHITE-BROWN  |
| BROWN        | 8 | 8          | BROWN        |

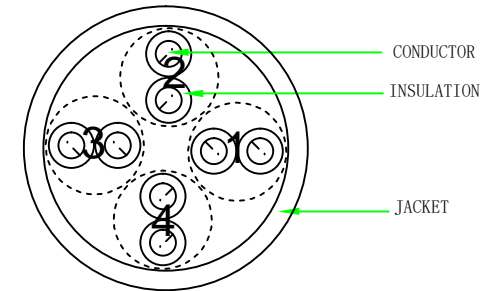

NOTE:

1. Fluke Channel Test ISO 11801 channel Class Ea
2. RoHS2.0 AND REACH compliant
3. Electrical test: 100% open short & miss wire test;
4. OPERATING TEMPERATURE: -10°C ~ 60°C
5. Print word: CAT6A U/UTP 4x2x32AWG/7 LSZH ISO11801 & EN50173 & ANSI/TIA568C.2
6. Minimum of the bending radius is 30mm (Suitable for all meters)


MATERIAL LIST

| ③   | CABLE      | CAT. 6A U/UTP CABLE (32AWG BC*1P)*4+JACKET:LSZH/YELLOW, OD:3.4±0.2mm | 1     |        |
|-----|------------|--|-------|--------|
| ②   | Over mold  | 48P PVC/YELLOW   | 2     |        |
| ①   | Plug       | RJ45 8P8C Unshielded Plug, PIN GOLD PLATED 3u", TRANSPARENT          | 2     |        |
| NO. | PARTS NAME | SPECIFICATION STANDARD   | QT' Y | REMARK |

Color: Yellow(Pantone 135C)

| ITEM No.   | LENGTH    |
|------------|-----------|
| 21.15.3920 | 150±5mm   |
| 21.15.3921 | 300±10mm  |
| 21.15.3922 | 500±30mm  |
| 21.15.3923 | 1000±30mm |
| 21.15.3924 | 1500±50mm |
| 21.15.3925 | 2000±50mm |
| 21.15.3926 | 3000±70mm |
| 21.15.3927 | 5000±70mm |

Minimum of the bending radius



DESC. ROLINE Cat.6A UTP Patch Cord, LSOH, Slim, Yellow

**SECOMP**

|    |     |                               |            |      |
|----|-----|-------------------------------|------------|------|
|    |     | NEW                           | 2019-06-17 | A    |
| BY | CHK | REVISION RECORD MODIFICATIONS | DATE       | REV. |