


WIRE ADDRESS

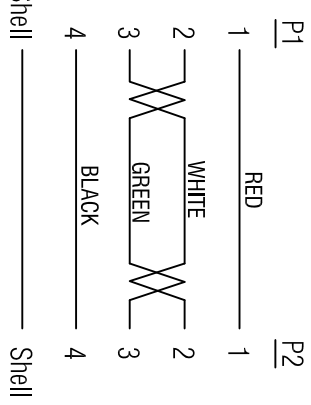

- Electrical Test:
1. 100% TEST OPEN SHORT MIS-WIRE.
  2. CONTACT RESISTANCE:3Ω MAX.
  3. INSULATION RESISTANCE:5MΩ MIN.
  4. HI-POT:300V DC/10MS.
  5. SUPPORT USB 2.0 480Mbps.

C	45P PVC BLACK		6
B	USB A MALE(White Insulator, Shell Nickel Plated, Pin Gold Plated 30U <sup>m</sup> )	2	PCS
A	UL2725 28#(7/0.127TC)*1P+24#(7/0.20TC)*2C+AL+D[28#(7/0.12/BO)]+B(AM/64B).OD=5.0mm,BLACK PVC JACKET.	1	PCS
NUMBER	PRODUCT SPECIFICATIONS		Quantity Unit
1			4

EAN USB 2.0 CABLE, USB AM-AM, 30U <sup>m</sup> , 0.8M		
Item	11.02.8908	
Draw	Andi	Date: 2014.05.22
Approval		
Duty	F16	
VER.A	REVISE	DATE
D		
C		
B		

