

# DIGITUS USB Type C to DisplayPort Bi-directional Adapter Cable

**DB-300334-010-S**  
**EAN 4016032484264**



**8K@30Hz. USB Type C to DP, adapter cable HBR3, Aluminum Housing, Black 1m**

The DIGITUS® USB Type C <=> DisplayPort bidirectional adapter cable supports the transfer from a USB Type C source to a DisplayPort interface. Likewise, it supports the transfer from a DisplayPort source to a USB Type-C interface. For example, you can connect your laptop (USB Type-C equipped) to your monitor, TV or projector (DisplayPort interface) or you can connect your PC (DisplayPort output) to a monitor (USB Type-C interface). Power is supplied via the USB port, so no external power source is necessary.

**The DIGITUS® USB Type-C to DisplayPort Adapter Cable supports transmission from USB Type-C sources to DP-capable displays.**

- Supports: Resolutions of up to 8K (7680x4320) with a display refresh rate of up to 30Hz.
- Supports: Resolutions up to 4K at 144Hz
- Supports: Resolutions up to 2K at 165Hz
- Data transmission speed: 25.92 Gbit/s
- Supports the transfer of audio and video signals
- Aluminum housing
- Ferrite filter: none
- USB-C products: yes


- Strands made of copper, foil and mesh shielding for robustness and a reliable connection
- DisplayPort standard: DP 1.4
- Supports: Multi-Stream Transport (MST)
- Manufacturer's notice:
- If you connect a USB-C monitor/TV/projector to a PC equipped with DP, make sure that your USB-C display supports DisplayPort signal output.
- The video output capabilities depend on your notebook's graphic card and the connected monitor. Some screens also limit the available resolution.
- AOC - Active Optic Cable: no
- AWG: 34
- Color cable: black
- Connector 1: USB C, plug
- Connector 2: DP, plug
- Ferrite filter: none
- USB compliance: USB Type-C™
- Length: 1 m
- Shielding: triple shielding

**Package contents**

- 1x USB Type-C Adapter Cable, USB Type-C to DP, 1 m

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	120	7.60	49.00	52.00	25.00	63,700.00
Packaging Unit Inside	1	0.06	0.00	0.00	0.00	0.00
Packaging Unit Single	1	0.06	2.30	7.50	23.50	405.38
Net single without Packaging	1	0.04	2.00	7.00	21.50	0.00

**More images:**

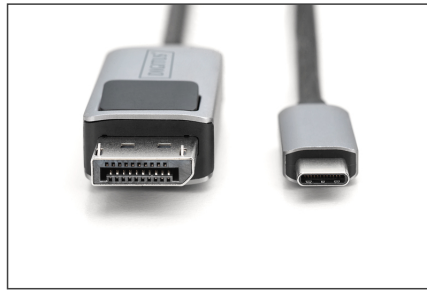

**Safety notes**

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
 Auf dem Schüffel 3  
 Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)