



item No.	length	Inner carton packing quantity
11.99.4333	2.5m±20mm	25pcs
11.99.4336	5m±30mm	20pcs
11.99.4338	10m±100mm	15pcs

### SPECIFICATION

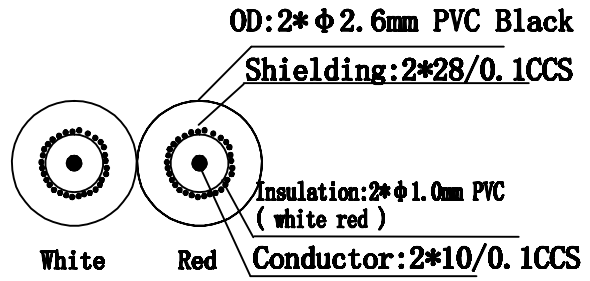

### WIRING DIAGRAM

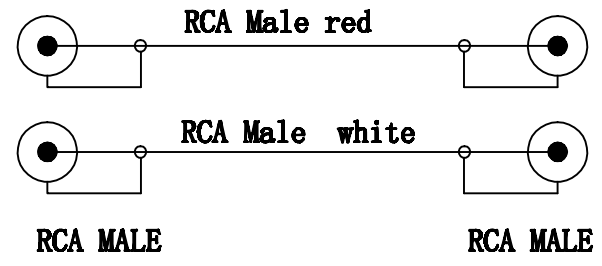

4	MOULDED2	PVC 45P red	2*10g
3	MOULDED1	PVC 45P white	2*10g
2	CABLE	AUDIO CABLE Black	L
1	CONNECTRORS	RCA Male Nickel Plated	4PCS
NO.	PARTS NAME	SPECIFICATION STANDARD	QTY

- TESTING: 100% OPEN AND SHORT AND MISWIRE TEST.
- INSULATION RESISTANCE: 100Meg Ohm.
- WITHSTAND VOLTAGE: 300 VOLTS RMS, 1 MINUTE.
- OPERATING TEMPERATURE RANGE: -20°C TO + 75°C.
- 100% RoHS & REACH COMPLIANT.

DRAWING APPROVED \_\_\_\_\_ DATE: \_\_\_\_\_  
 SAMPLE APPROVED PER \_\_\_\_\_ DATE: \_\_\_\_\_  
 DRAWING SPECIFICATIONS

NAME	VALUE Cinch Cable, duplex M - M, black	<b>SECOMP</b>
ITEM NO.	11.99.4333/11.99.4336/11.99.4338	
CUS. P/N	<b>2xRCA M TO 2xRCA M</b>	ENG. DATE
DRAWING NO.	<b>MW-SIN -003</b>	CHECKED DATE
REV. 00	CUS. REV.	APPROVED DATE

01	NEW ISSUE	2018.03.22
REV.	MODIFY DESCRIPTION	DATE