


A

A


SCALE 8/1

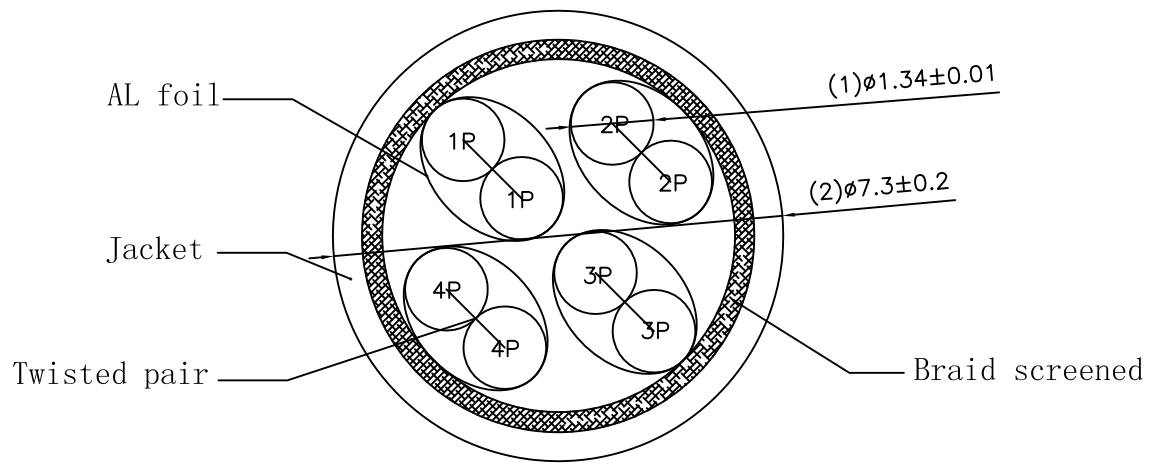

B

B

SCALE 1/2

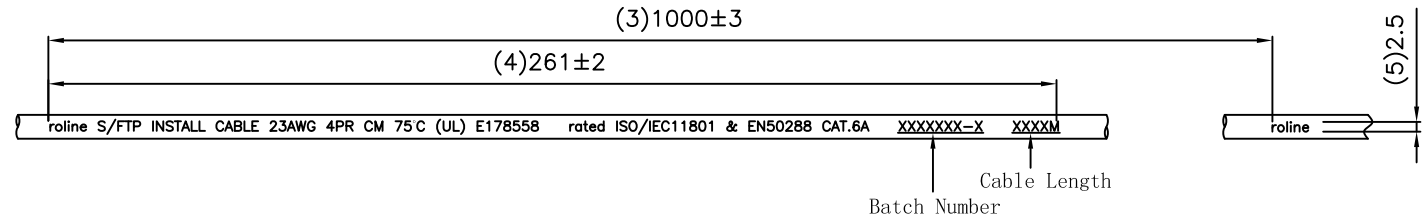

C

C

SCALE 1/1

roline S/FTP INSTALL CABLE 23AWG 4PR CM 75°C (UL) E178558 rated ISO/IEC11801 & EN50288 CAT.6 XXXXXXXX-X XXXXM

D

D

Specifications :

1. Wiring : T568B
2. Copper conductor : 23AWG
3. XXXXXXXX-X : Batch number
4. XXXXM : Cable length
5. Cable printing : blue printing
6. Jacket material : PVC
7. Printing meter number on the end of each test. 0001, 0002, 0003.....9999
8. With ROHS and REACH compliant.
9. CPR CLASS Eca
10. Operating temperature : -20°C ~ +70°C

Bending radius(4x cable OD)	NVP	Item NO	Description	Color
30mm	80.0%	• 21.15.0891	ROLINE S/FTP (PiMF) Cable Cat.6, Solid Wire, AWG23, 300m	Grey
30mm	80.0%	• 21.15.0890	ROLINE S/FTP (PiMF) Cable Cat.6, Solid Wire, AWG23, 100m	Grey

GENERAL TOLERANCE OF DIMENSIONS x.xxx ±0.005 x.xx ±0.05 x.x ±0.1	DRAWING	15.FEB.2022	SP	SECOMP
	CHECK	15.FEB.2022	CMD	
	APPROVAL	15.FEB.2022	YUAN	
		DATE	NAME	
SCALE	1/1 (A4)	UNIT	mm	
DRAWING NO.		Roline S/FTP 23AWG Solid C6 CABLE PVC(E01)		
DRAWING CLASSIFICATION		E	SHEET	1 OF 1