


Delock PCI Express x1 Card 1 x SFP Gigabit LAN i210

Description

This PCI Express network card by Delock provides a connection for an SFP module with a transfer rate of 1000 Mbps. The SFP slot accepts an optional Gigabit SFP module by Delock to connect a PC via a fiber optic cable to the network.

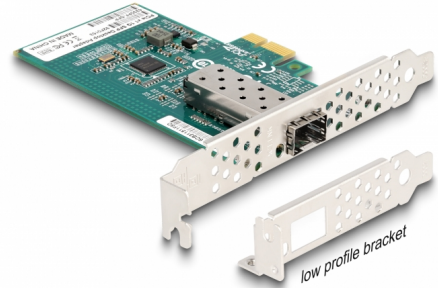

Item no. 89481

EAN: 4043619894819

Country of origin: China

Package: White Box

Specification

- Connectors:
 - internal:
 - 1 x PCI Express x1, V2.1
 - external:
 - 1 x SFP slot for 1 Gbps SFP module
- Chipset: Intel i210
- Data transfer rate:
 - Gigabit Ethernet up to 1 Gbps
 - PCI Express x1 up to 2.5 Gbps
- IEEE 802.3z compliant
- Supports IEEE 802.1Q Virtual LAN (VLAN)
- Supports 9k Jumbo Frames
- Supports PXE

System requirements


- Windows Server-2008/Server-2008 R2/Server-2012/Server-2012 R2/7/7-64/8.1/8.1-64/10/10-64, Linux ex Kernel 2.6.x
- PC with one free PCI Express slot

- SFP module

Package content

- PCI Express card
- Low profile bracket
- Driver CD
- User manual

Images

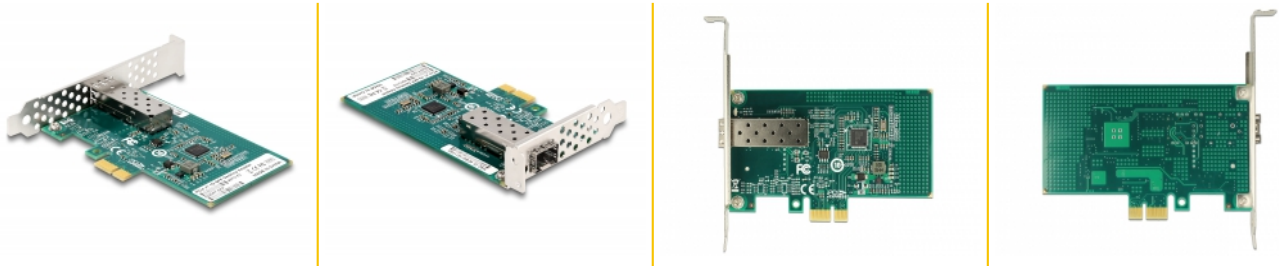

General

| | |
|-----------------------------|--|
| Supported operating system: | Linux Kernel 2.6 or above Windows 10 32-Bit Windows 10 64-Bit Windows 7 32-Bit Windows 7 64-Bit Windows 8.1 32-Bit Windows 8.1 64-Bit Windows Server 2008 R2 Windows Server 2012 R2 Windows Server 2012 Windows Vista 32-bit Windows Vista 64-bit |
|-----------------------------|--|

Interface

| | |
|-----------|-----------------------------|
| External: | 1 x 1 Gigabit LAN SFP+ Slot |
| Internal: | 1 x PCI Express x1, V2.1 |

Technical characteristics

| | |
|---------------------|-------------------------------|
| Chipset: | Intel® i210 |
| Data transfer rate: | Gigabit Ethernet up to 1 Gbps |

Physical characteristics

| | |
|---------------|----------------------|
| Slot bracket: | Low Profile standard |
|---------------|----------------------|