



Datenblatt - Fiche technique - Data sheet

**11.04.5645**



ROLINE GOLD DisplayPort Kabel, DP ST - ST, 2,0m

ROLINE GOLD Câble DisplayPort DP M - DP M, 2,0m


ROLINE GOLD DisplayPort Cable, DP-DP, M/M, 2 m

# ROHS-COMPLIANT

LTR	REV	DESCRIPTION	DATE

DISPLAYPORT MALE  
INS:BLACK

DISPLAYPORT MALE  
INS:BLACK

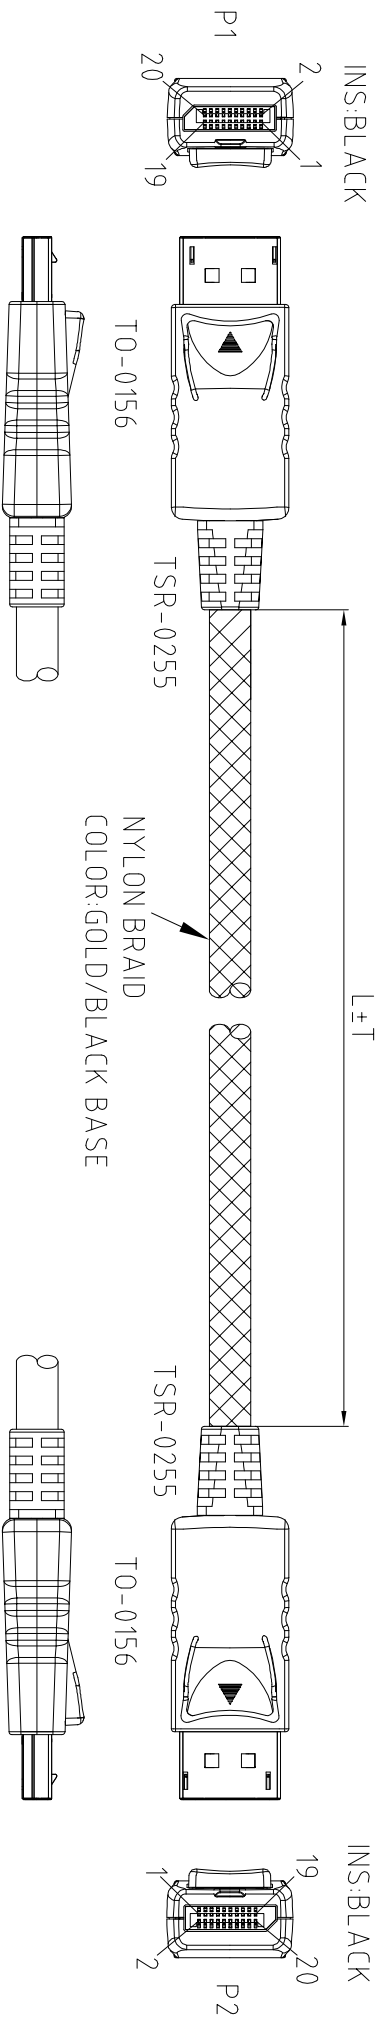

**NOTE:**

- CABLE: UL-20276 [#30(7/0.1 T.C)×1P INS:FOAM-PE+D.W(7/0.1 T.C)+AL/MY +Hot-melt Mylar]×5C + #30(7/0.1 T.C)×4C INS:Polyethylene+AL/MY+ B.D(85%) PVC JACKET, OD:6.5±0.2mm COLOR:MATT BLACK(INK-K01).
- CONNECTOR:  
P1 & P2: DISPLAYPORT 20P MALE W/PCB & LATCH CONTACT:15U"  
GOLD PLATED SHELL.
- SHIELD:INNER MOLD MUST BE WRAPPED COPPER TO CONNECTOR SHELL & CABLE BRAID
- HOOD:ASS'Y TYPE, PLASTIC HOOD COLOR: GOLD
- ELECTRICAL TEST:  
(1)100% OPEN SHORT & MIS WIRE TEST.  
(2)CONTACT RESISTANCE 3 ohm Max.  
(3)INSULATION RESISTANCE 10M ohm Min.
- PACKING: EACH PC / POLYBAG+BIG HEADER CARD+BAR CODE LABEL.

200-1484-3	11.04.5647-5	5000	50	5	10
200-1484-2	11.04.5646-10	3000	30	10	20
200-1484-1	11.04.5645-10	2000	30	10	20
DWG	P/N	L(mm)	T(mm)	PCS/INNER CARTON	PCS/CARTON


Tolerance	Inch	M/M
X	.015	.30
XX	.010	.10
XXX	.005	.05

**Rotronic co., LTD.**  
Title  
DISPLAYPORT ASS'Y CABLE

Draw	FANNIE 12/13/10'	Customer P/N	Customer: T-RAG
Chk		App'd	
Engr		Scale	NONE
		Units	M/M
		Third Angle Projection	
		Dwg No.	200-1484
		REV:	A
		Sheet:	1/2

LTR	REV	DESCRIPTION	DATE

PIN OUT

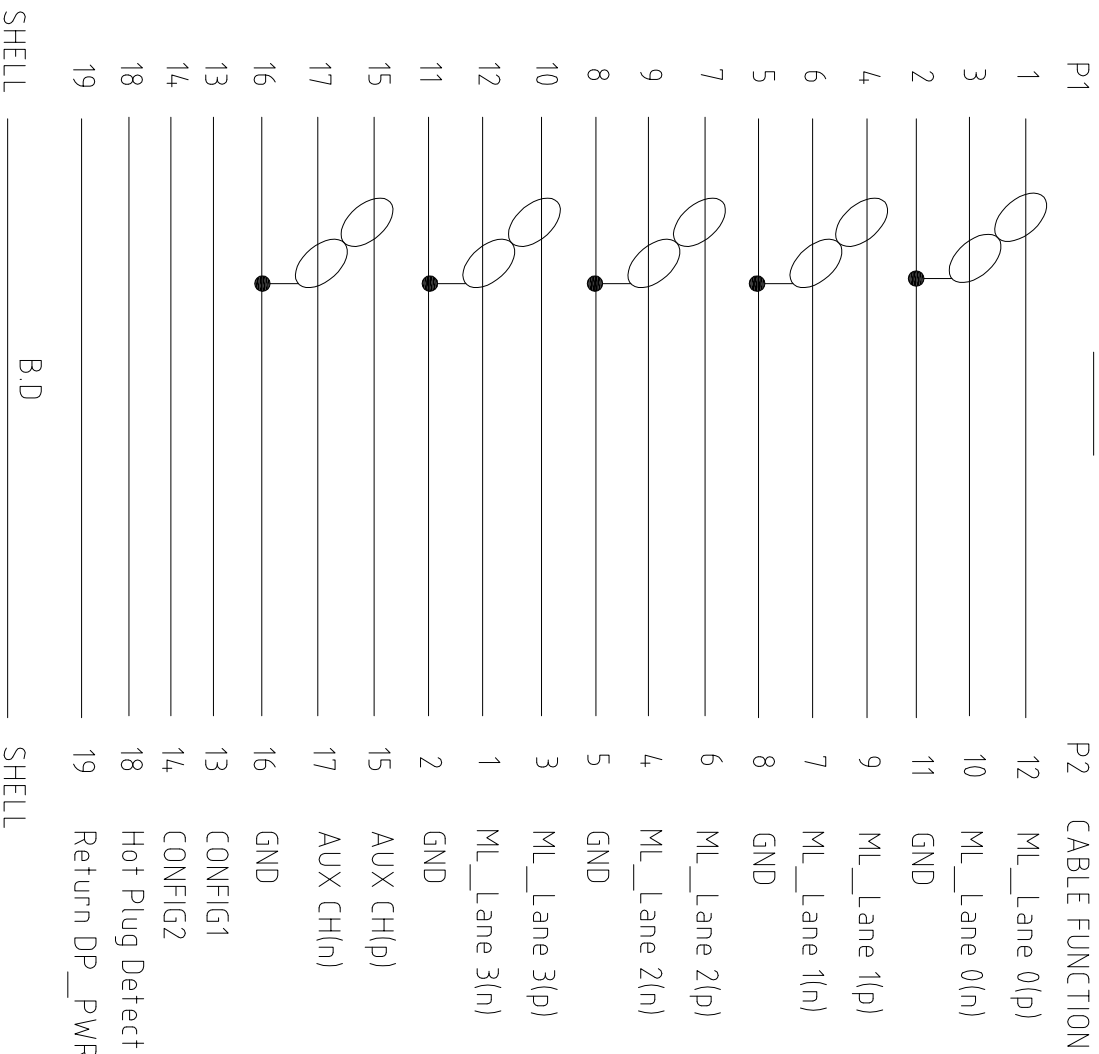

Tolerance Inch M/M		Title	
X	.015 .30	<b>Rotronic co., LTD.</b>	
XX	.010 .10	DISPLAYPORT ASS'Y CABLE	
XXX	.005 .05	Customer P/N	
Draw	FANNIE 12/13/10'	App'd	Customer: T-RAG
Check	Engr	Scale  NONE	Units  M/M
		Dwg No. 200-1484	REV: A
			Sheet: 2/2