MOLDING:	DATE	REV.	REVISION	DRAFTING	CHECKED
SF-04 SF-82	2021/05/21	A/0	Initial	Bob.Chen	

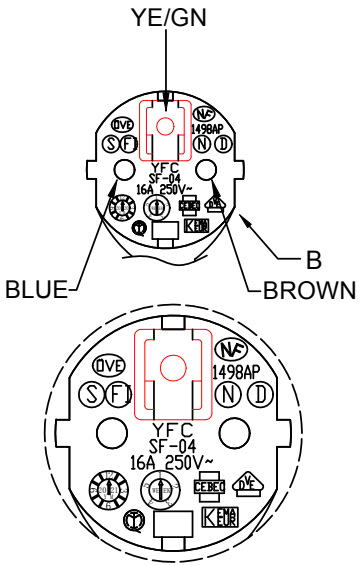

B
1.5:1

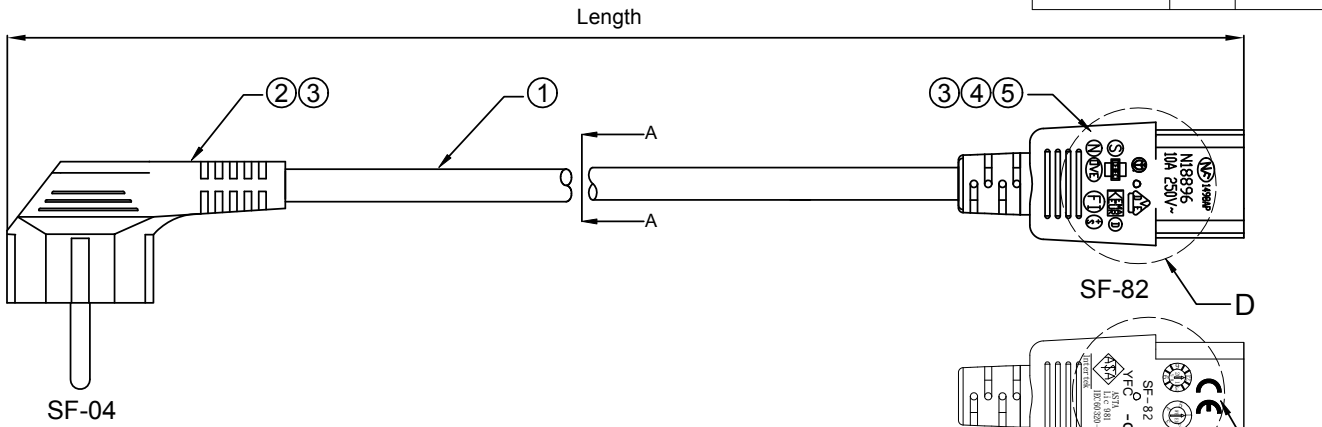

WIRE MARKING(NO.129):

+ ∽ + ∽ + ∽ KEMA-KEUR (OVE) (S) (N) (D) (FI) △ CEBEC 972 ◁VDE▷ NF-USE 1345

IEMMEQU H05VV-F 3G0.75MM² V-75 300/500V ORDINARY DUTY NSW17436 YFC BON-EAGLE

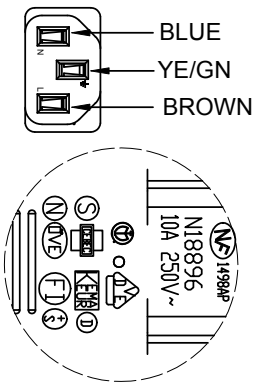

D
1.5:1



C
1.5:1

Item	Color	RAL NO. (similar to)	Length
AK5401	WHITE	RAL9003	500^{+15}_{-10}
AK5402	WHITE	RAL9003	1000^{+15}_{-10}
AK5235	WHITE	RAL9003	1500±20
AK5236	WHITE	RAL9003	2000±20
AK5145	BLACK	RAL9011	500^{+15}_{-10}
AK5146	BLACK	RAL9011	1000^{+15}_{-10}
AK5012	BLACK	RAL9011	1500±20
AK5015	BLACK	RAL9011	2000±20
AK5253	BLACK	RAL9011	250^{+15}_{-10}

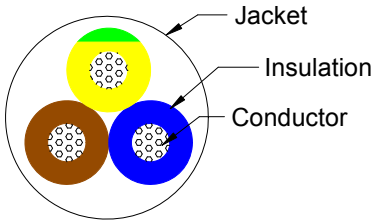

A-A

PINOUT		
SF-04	WIRE	SF-82
E	YE/GN	E
L	BROWN	L
N	BLUE	N

Polarity and Conduction and Penetrationt Test	
Dielectric Voltage Withstand Test : 2000V / 1 Sec	
Electrical Performance (20°C)	
Item	Parameter
Conductor Resistance	≤ 26.0Ω/1000m
Voltage Rating	AC 300V/500V

No.	TITLE	DESCRIPTION	Q'TY
⑤	Housing	IEC C13 three Pin(SF-82)inner frame , Black	1PC
④	Terminal	IEC C13 Female terminal,matching 20-16AWG wire	3PCS
③	Molding	50P PVC	A/R
②	Terminal	European standard,black french connector SF-04.	1PC
①	CABLE	H05VV-F 3Gx0.75mm² PVC	A/R

Unless specified on the drawing, tolerances are per the follows:

X. ±0.20 X° ±3
.X ±0.10 .X°±0.3
.XX ±0.05

DRAW. NO	YFAC-S210104	TITLE	H05VV F0.75mm²*3C SF-04 TO SF- 82 WH123 CABLE ASS'Y
CUSTOMER	ACT		
CUST' R P/N	--	DRAW	Bob.Chen
SCALE	NONE	CHECK	
UNIT	mm	APPROVED	

DATE	2021.05.21		
DATE			
SHEET	1 of 1		

Cable Spec NO.	--	Part Number	--	Note	■ RoHS2.0	■ Reach	□ GP	□ HF	□ Other