


Delock PCI Express x4 Card to 1 x external USB Type-C™ female + 1 x external USB Type-A female SuperSpeed USB 10 Gbps

Description

This PCI Express card by Delock expands the PC by two external USB 10 Gbps ports. Different USB devices, such as docking stations, card readers, external enclosure etc., can be connected to the card. The card allows a data transfer rate of 10 Gbps on both ports when used simultaneously.

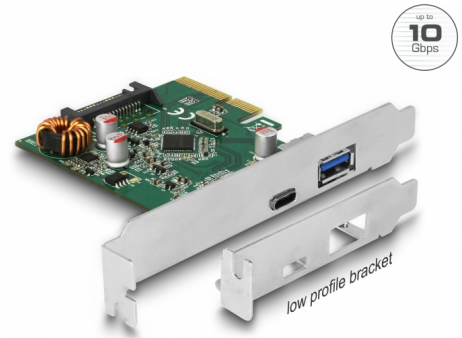

Item no. 90299

EAN: 4043619902996

Country of origin: China

Package: Retail Box

Specification

- Connectors:
 - external:
 - 1 x USB 10 Gbps USB Type-C™ female
 - 1 x USB 10 Gbps Type-A female
 - internal:
 - 1 x SATA 15 pin power connector
 - 1 x PCI Express x4, V3.0
- Chipset: Asmedia ASM3142
- Data transfer rate up to 10 Gbps
- Downwards compatible to USB 3.0, USB 2.0, USB 1.1
- Power supply via PCI Express interface or via SATA 15 pin power connector
- Electrical power per port:
 - USB Type-C™: max. 15 watt (5 V / 3 A)
 - USB Type-A: max. 4.5 watt (5 V / 0.9 A)
- Supports eXtensible Host Controller Interface (xHCI) specification 1.1
- Supports Multiple INs

System requirements

- Linux Kernel 4.6 or above
- Windows 7/7-64/8.1/8.1-64/10/10-64/11
- PC with one free PCI Express x4 / x8 / x16 / x32 slot

Package content

- PCI Express card SuperSpeed USB 10 Gbps
- Low profile bracket
- Driver CD
- User manual

Images



Legend:	1 x SuperSpeed USB 10 Gbps USB 3.1 Gen 2 Type-C™ female	■
	2 x SuperSpeed USB 10 Gbps USB 3.1 Gen 2 Type-A female	■
	3 x SATA 6 Gbit/s power connector	■
	4 x PCI Express x4, x8, x16	■

General

Form factor:	Low Profile
Supported operating system:	Linux Kernel 4.6 or above Windows 10 32-Bit Windows 10 64-Bit Windows 7 32-Bit Windows 7 64-Bit Windows 8.1 32-Bit Windows 8.1 64-Bit Windows 11

Interface

External:	1 x USB 10 Gbps USB Type-C™ female 1 x USB 10 Gbps Type-A female
Internal:	1 x PCI Express x4, V3.0 1 x SATA 15 pin power connector

Technical characteristics

Chipset:	Asmedia ASM3142
Data transfer rate:	USB 10 Gbps up to 10 Gb/s

Physical characteristics

Slot bracket:	Low Profile standard
---------------	-------------------------