

# Omada Business Cloud SDN Solution

Omada EAP - Business Wi-Fi Series



Omada SDN Controller




EAP773

# Omada Solution

				
<b>Hospitality</b>	<b>Education</b>	<b>Retail</b>	<b>Office</b>	<b>Catering</b>
High Quality and Full Coverage Wi-Fi	High-Density Wi-Fi	Social Marketing for O2O	Wireless and Wired Connections	Full Wi-Fi Coverage in High-Density Environment

## Software Defined Networking (SDN) with Cloud Access


Omada Software Defined Networking (SDN) platform integrates network devices, including access points, switches and gateways, providing 100% centralized cloud management. Omada creates a highly scalable network—all controlled from a single interface. Seamless wireless and wired connections are provided, ideal for use in hospitality, education, retail, offices, and more.

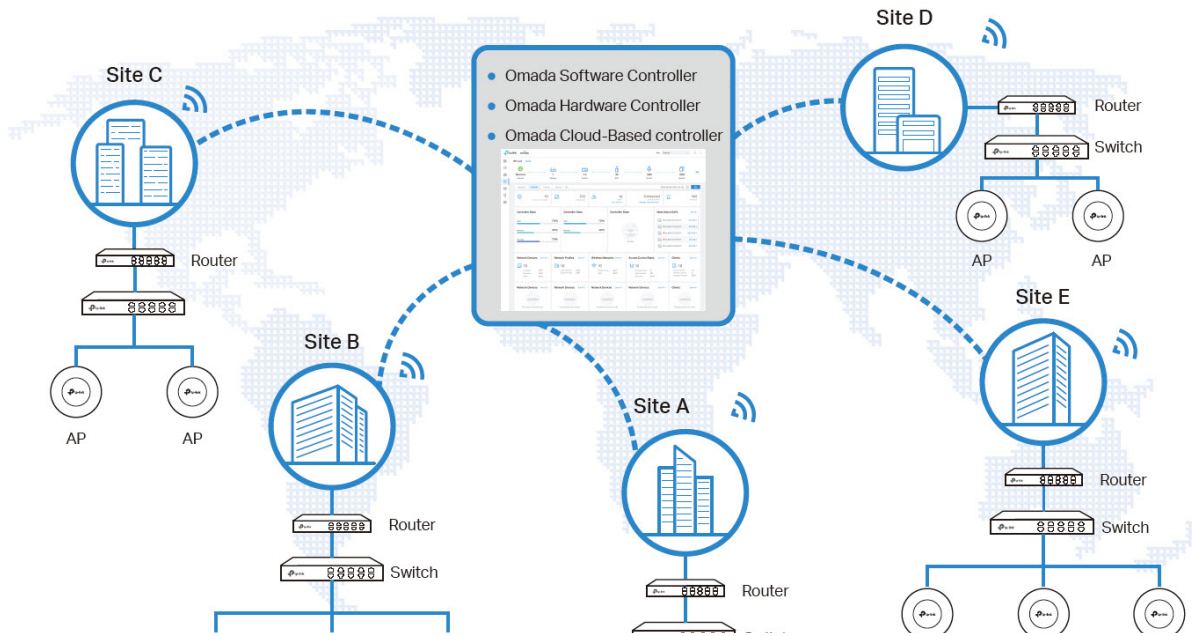

		
<b>Higher Efficiency</b>	<b>Higher Security</b>	<b>Higher Reliability</b>
<ul style="list-style-type: none"> <li>Centralized Cloud Management</li> <li>Zero-Touch Provisioning</li> <li>AI-Driven Technology</li> <li>Auto Channel Selection and Power Adjustment</li> <li>Multi-Tenant Privilege Assignment</li> <li>Easy and Intelligent Monitoring</li> </ul>	<ul style="list-style-type: none"> <li>Separate Management and User Data</li> <li>Abundant Security Functions</li> </ul>	<ul style="list-style-type: none"> <li>99.99% SLA Availability</li> <li>Reliable Connections with High-Density Clients</li> </ul>

# Hassle-Free Centralized Cloud Management

100% centralized cloud management of the whole network from different sites—all controlled from a single interface anywhere, anytime.

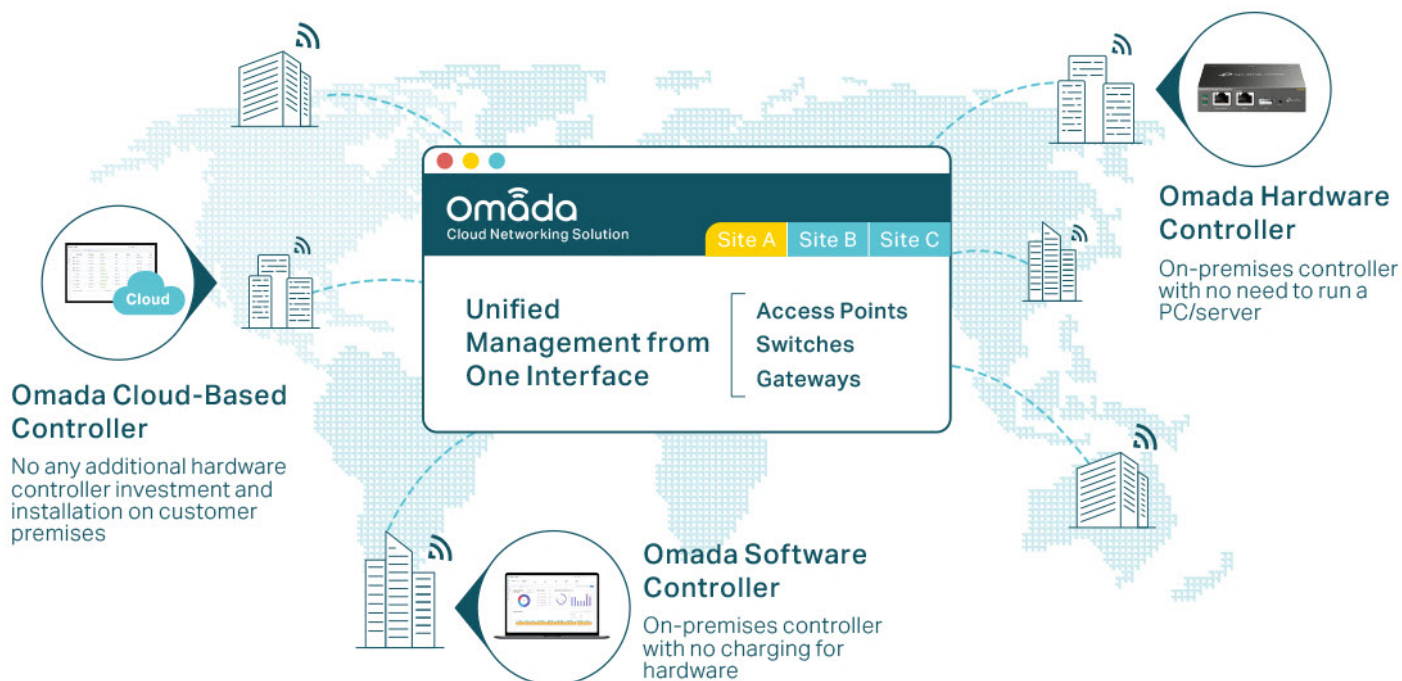

- ✓ No additional training needed
- ✓ Unlimited scalability
- ✓ Batch management
- ✓ Devices still work even when not connected to the Cloud

## Zero-Touch Provisioning for Efficient Deployment\*

Omada zero-touch provisioning allows remotely deployment and configuration of multi-site networks, so there's no need to send out an engineer for on-site configuration. The Omada Cloud ensures efficient deployment with lower costs.



\* Zero-Touch Provisioning is supported when using Omada-Cloud Based Controller.

# AI-Driven Technology for Stronger Performance and Easy Network Maintenance


## Intelligent Network Analysis, Warning, and Optimization\*

- ▶ Analyzes potential network problems and sends optimization suggestions for higher network efficiency
- ▶ Locates network faults, warns and notify users, and generates solutions to reduce network risk



## Auto Channel Selection and Power Adjustment


Provides powerful wireless performance while greatly reducing Wi-Fi interference by automatically adjusting the channel settings and transmission power levels of neighboring APs in the same network.

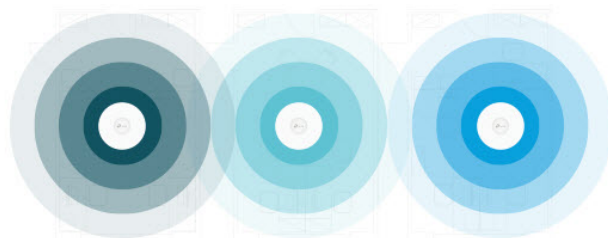

● Channel 1 ● Channel 11 ● Channel 6

## Assign Different Management Roles

Multi-user privilege assignment is available to increase management efficiency and security. Multi-person management, multi-level permissions, and the ability to add admins as needed, enable flexible network operation and maintenance.

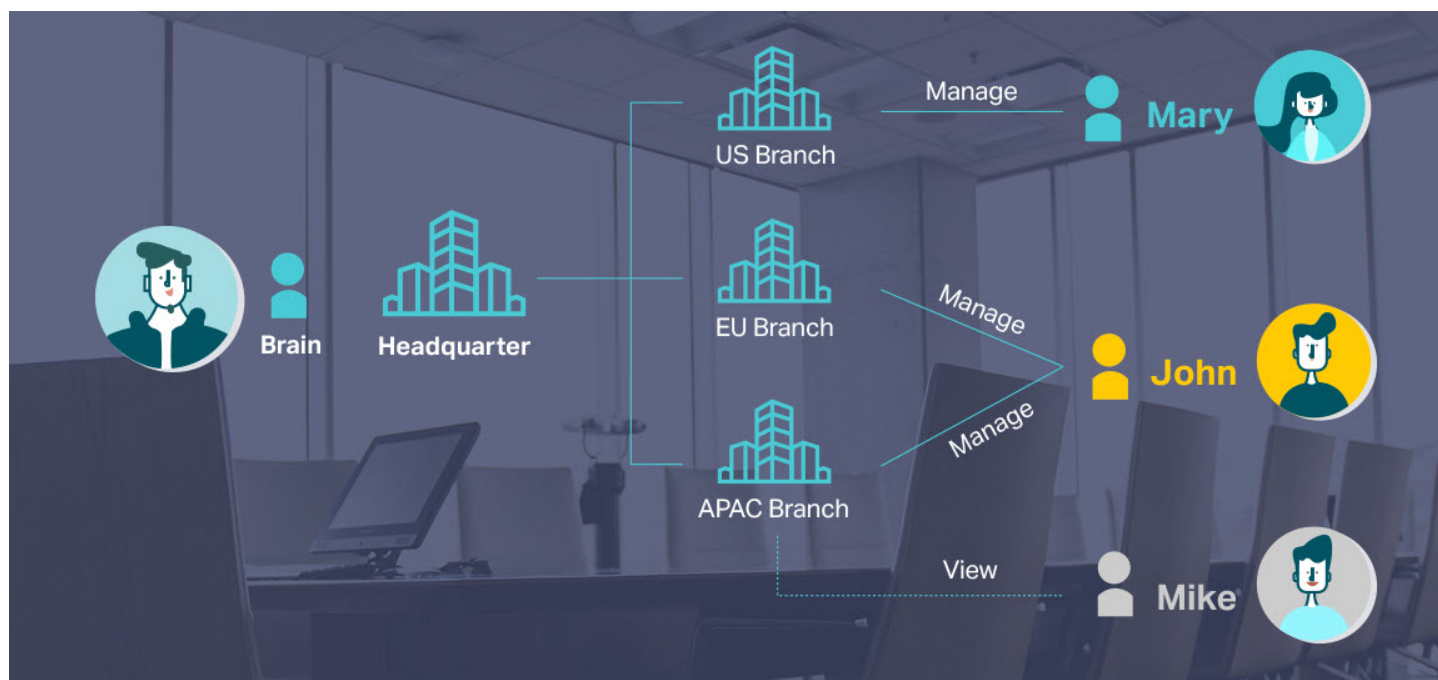

# Easy and Intelligent Network Monitoring

The easy-to-use dashboard makes it easy to see your real-time network status; check network usage and traffic distribution; receive network condition logs, abnormal event warnings, and notifications; or even track key data for better business results. Network topology helps IP admins quickly see and troubleshoot connection at a glance.

**Network Status Report**

**Check the Traffic Distribution**

**Network Topology at a Glance**

omada

Download on the App Store

GET IT ON Google Play

# Comprehensive Protection for the Whole Network

**Better Protection for Users' Privacy**

TP-Link Omada separates network management data from user data, with no user traffic passing through the cloud, ensuring better protection for users' privacy.

Cloud

User Traffic

Management Data

T1 / DSL

SafeStream Gateway

JetStream Switch

Omada Access Point

**Abundant Security Functions**

Powerful firewall and advanced security functions further protect the network and data.

VPN

High-Security VPN

Powerful Firewall

IP/MAC/URL Filtering


Access Control

Advanced WPA3 Encryption

Captive Portal


## Multiple Factors Guarantee Higher Reliability

Higher reliability of cloud service is guaranteed with 99.9% SLA availability, 24/7 automated fault detection, geographically isolated backup servers, and reliable product quality. Your network functions even if management traffic is interrupted.

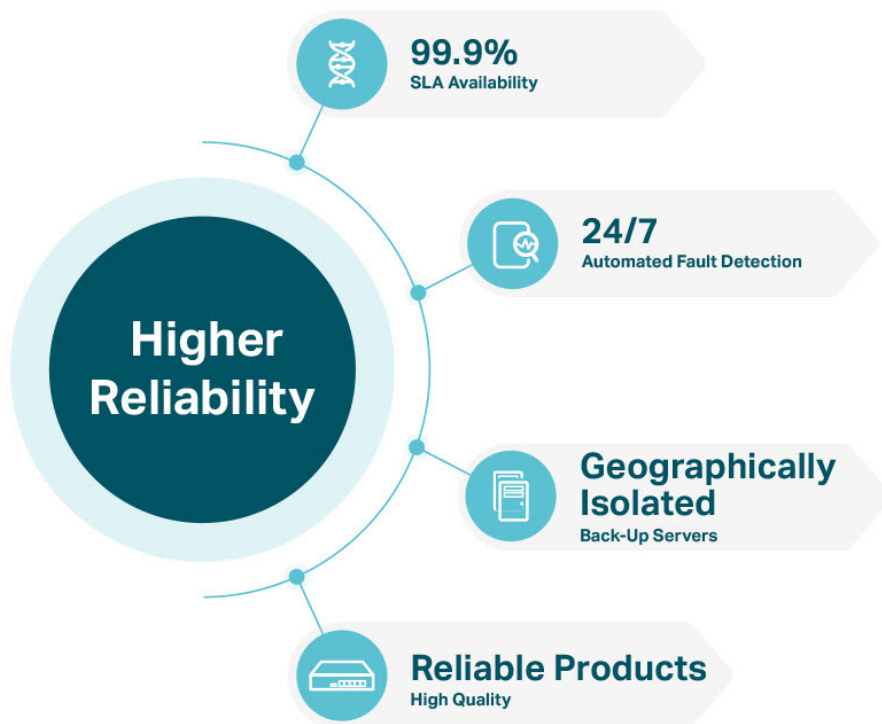

## Reliable Connections Even with High-Density Clients

Equipped with enterprise chipsets, dedicated antennas, advanced RF functions, auto channel selection, and power adjustment, Omada APs have high concurrency capacities for remarkable performance in high-density environments.

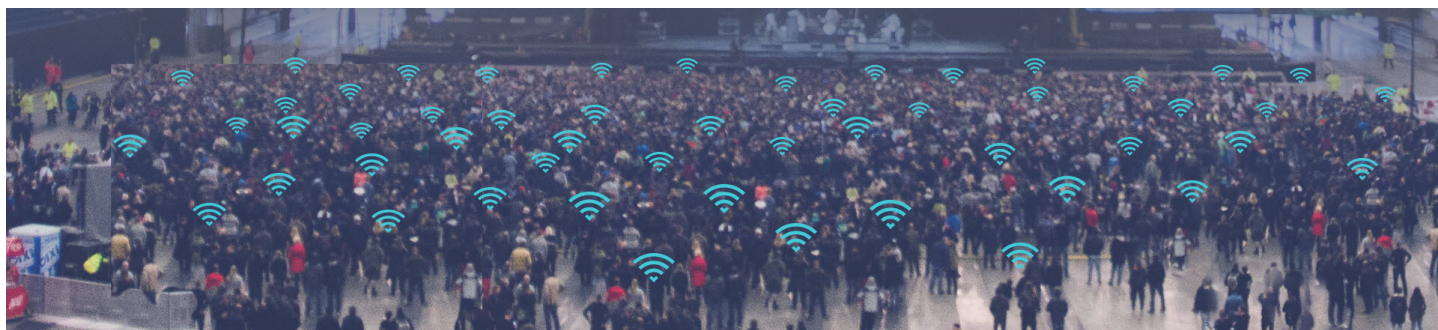

# EAP Product Features

## Easy-Mount Design

The Ceiling Mount EAP's elegant appearance and easy-mount design promote fast installation on any wall or ceiling surface, and allow it to blend in seamlessly with most interior decorating styles. The slimline, inconspicuous Wall Plate EAP can be easily installed into any standard EU/US wall junction box or 86 mm wall junction box.

## PoE Power Supply\*

With IEEE 802.3af/at/bt PoE or Passive PoE, you can use Ethernet cables to transfer both electrical power and network data, making deployment more flexible and removing the need to install additional power cabling.

## Business-Class Hardware Design

Enterprise-class chipsets offer outstanding performance and support longer running time, higher client capacity and greater range. Dedicated high-power amplifiers, specialized antennas and professionally designed RF shields ensure excellent wireless performance.

## Seamless Roaming\*

802.11k and 802.11v seamless roaming provide seamless switching to the access point with optimal signal when moving between APs.

## Mesh\*

Omada Mesh technology enables wireless connectivity between access points for extended range, making wireless deployments more flexible and convenient.

## Increased Efficiency with OFDMA\*

The Wi-Fi 6 and above standards use OFDMA for more efficient channel use and reduced latency. Imagine your WiFi connection as a series of delivery trucks delivering data packets to your devices. With 802.11ac Wi-Fi, each delivery truck could only deliver one parcel to one device at a time. But with OFDMA, each truck can deliver multiple parcels to multiple devices simultaneously. This vast improvement in efficiency works for both uploads and downloads.

## Advanced RF Management

MU-MIMO, Airtime Fairness, Beamforming, and Band Steering Technologies guarantee optimal RF performance for business-level applications.

## Easy Centralized Management

Configure and monitor hundreds of Omada EAPs with ease using the Omada controller.

\* PoE support varies by model. For detailed information, refer to the specifications.


\* Only certain devices support Seamless Roaming. For detailed information, refer to the specifications.

\* Only certain devices support Mesh. For detailed information, refer to the specifications.

\* Only 802.11ax and 802.11be devices support OFDMA.

# EAP Product List

## Ceiling Mount Wi-Fi 7 AP

Picture	
Model	EAP773
Product	US: BE11000 Ceiling Mount Wi-Fi 7 Access Point EU: BE9300 Ceiling Mount Wi-Fi 7 Access Point
Speed	US: 2.4 GHz: 574 Mbps, 5 GHz: 4320 Mbps, 6 GHz: 5760 Mbps EU: 2.4 GHz: 574 Mbps, 5 GHz: 2880 Mbps, 6 GHz: 5760 Mbps
Ethernet Port	1x 10Gbps Ethernet Port
Power Supply	802.3at PoE or 12V/2.5A DC DC Power Adapter Is Not Included
Internal Antennas	2.4GHz: 2 x 4dBi; 5GHz: 2 x 5dBi; 6GHz: 2 x 5dBi



# Specifications

## Ceiling Mount Wi-Fi 7 AP

Model		EAP773
Name		US: BE11000 Ceiling Mount Wi-Fi 7 Access Point EU: BE9300 Ceiling Mount Wi-Fi 7 Access Point
Main Design	LAN Interfaces	1x 10Gbps Ethernet Port
	Wi-Fi Standards	IEEE 802.11 a/b/g/n/ac/ax/be
	Maximum Data Rate	US: 574 Mbps (2.4 GHz) + 4320 Mbps (5 GHz) + 5760 Mbps (6 GHz) EU: 574 Mbps (2.4 GHz) + 2880 Mbps (5 GHz) + 5760 Mbps (6 GHz)
	Wireless Client Capacity	2 GHz: 128, 5 GHz: 128, 6 GHz: 128
	Antennas	2.4GHz: 2 x 4dBi; 5GHz: 2 x 5dBi; 6GHz: 2 x 5dBi
	Bluetooth	1 x 4.0 dBi, Bluetooth 5.2 *Firmware update may be required.
	Transmit Power	CE: < 20 dBm (2.4 GHz, EIRP); < 23 dBm (5 GHz, band 1&band 2, EIRP); < 28 dBm (5 GHz, band 3, EIRP); <23dBm (6 GHz, EIRP) FCC:< 25 dBm (2.4 GHz); < 25 dBm (5 GHz); < 23 dBm (6 GHz)
	Reception Sensitivity	2.4G: 11ax HE20MCS0:-96dBm; 11ax HE20MCS11:-66.5dBm 11ax HE40MCS0:-93dBm; 11ax HE40MCS11:-64dBm 5G: 11be EHT20MCS0:-94dBm; 11be EHTMCS13:-63dBm 11be EHT40MCS0:-90.5dBm; 11be EHT40MCS13:-60dBm 11be EHT80MCS0:-88dBm; 11be EHT80MCS13:-57.5dBm 11be EHT160MCS0:-85dBm; 11be EHT160MCS13:-55.5dBm 6G: 11be EHT20MCS0:-93dBm; 11be EHTMCS13:-63dBm 11be EHT40MCS0:-90dBm; 11be EHT40MCS13:-60dBm 11be EHT80MCS0:-87.5dBm; 11be EHT80MCS13:-57.5dBm 11be EHT160MCS0:-84dBm; 11be EHT160MCS13:-55dBm 11be EHT320MCS0:-81.5dBm; 11be EHT320MCS0:-52.5dBm
Centralized Management	Omada Software Controller	•
	Omada Hardware Controller	•
	Omada APP	•
Security	Captive Portal Authentication	•
	Access Control	•
	Maximum number of MAC Filter	4000
	Wireless Isolation between Clients	•
	VLAN	•
	Rogue AP Detection	•
Wireless Encryption	WPA-Personal/Enterprise, WPA2-Personal/Enterprise, WPA3-Personal/Enterprise, OWE	

# Ceiling Mount Wi-Fi 7 AP

Model		EAP773
Wireless Function	Multiple SSIDs	24 (8 on each band)
	Channel	EU: 2G: 1~13; 5G: 36~140; 6G: 33~93 US: 2G:1~11; 5G: 36~165; 6G: 33~233
	Enable/Disable Wireless Radio	•
	Enable/Disable SSID Broadcast	•
	Guest Network	•
	Automatic Channel Assignment	•
	Transmit Power Control	Adjust transmit Power on dBm
	QoS (WMM)	•
	Seamless Roaming	•
	Mesh	•
	Beamforming	•
	MU-MIMO	2*2 DL/UL MU-MIMO
	OFDMA	DL/UL OFDMA
	Rate Limit	Based on SSID/Client
	Load Balance	•
	Airtime Fairness	•
	Band Steering	•
	RADIUS Accounting	•
	MAC Authentication	•
	Reboot Schedule	•
Wireless Schedule	•	
Wireless Statistics	•	
Static IP/Dynamic IP	•	
Support Data Rates	802.11be	5G Band: EU: 8Mbps to 2882Mbps(MCS0—MCS13,NSS=1 to 2 BE20/40/80/160) US: 8Mbps to 4324Mbps(MCS0—MCS13,NSS=1 to 2 BE20/40/80/160/240) 6G Band: 8Mbps to 5765Mbps(MCS0—MCS13,NSS=1 to 2 BE20/40/80/160/320)
	802.11ax	2G Band: 8Mbps to 574Mbps(MCS0—MCS11,NSS=1 to 2 HE20/40) 5G Band: 8Mbps to 2402Mbps(MCS0—MCS11, NSS=1 to 2 HE20/40/80/160) 6G Band: 8Mbps to 2402Mbps(MCS0—MCS11, NSS=1 to 2 HE20/40/80/160)
	802.11ac	6.5Mbps to 2166.7Mbps(MCS0—MCS11,NSS=1 to 2 VHT20/40/80/160)
	802.11n	6.5Mbps to 300Mbps(MCS0—MCS15,HT20/40)
	802.11g	6, 9, 12, 18, 24, 36, 48, 54 Mbps
	802.11b	1, 2, 5.5, 11 Mbps
	802.11a	6, 9, 12, 18, 24, 36, 48, 54 Mbps


## Ceiling Mount Wi-Fi 7 AP

Model		EAP773
Management	LED ON/OFF Control	•
	Management MAC Access Control	•
	Web-based Management	•
	SNMP	v1, v2c, v3
	SSH	•
	Restore & Backup	•
	Firmware update via Web	•
	NTP	•
	System Log	•
	Email Alerts	•
Physical & Environment	Power Supply	802.3at PoE or 12V/2.5A DC DC Power Adapter Is Not Included
	Maximum Power Consumption	EU: 24.05 W (For PoE); 20.92 W (For DC); US: 25.44 W (For PoE); 22.57 W (For DC);
	Reset	•
	Mounting	Ceiling / Wall mouting (Kits included)
Others	Certifications	CE, FCC, RoHS, IC
	Dimensions (W x D x H)	220 x 220 x 32.5 mm
	Net Weight	736g
	Enclosure Material / Rack Material	Top cover: PC Bottom shell: aluminum alloy Mounting rack: stainless steel
	Lightning Protection	2KV
Environment	Operating Temperature: 0 °C–40 °C (32 °F–104 °F); Storage Temperature: -40 °C–70 °C (-40 °F–158 °F); Operating Humidity: 10%–90% non-condensing; Storage Humidity: 5%–90% non-condensing;	

# Antenna Radiation Patterns

Ceiling Mount AP

EAP773

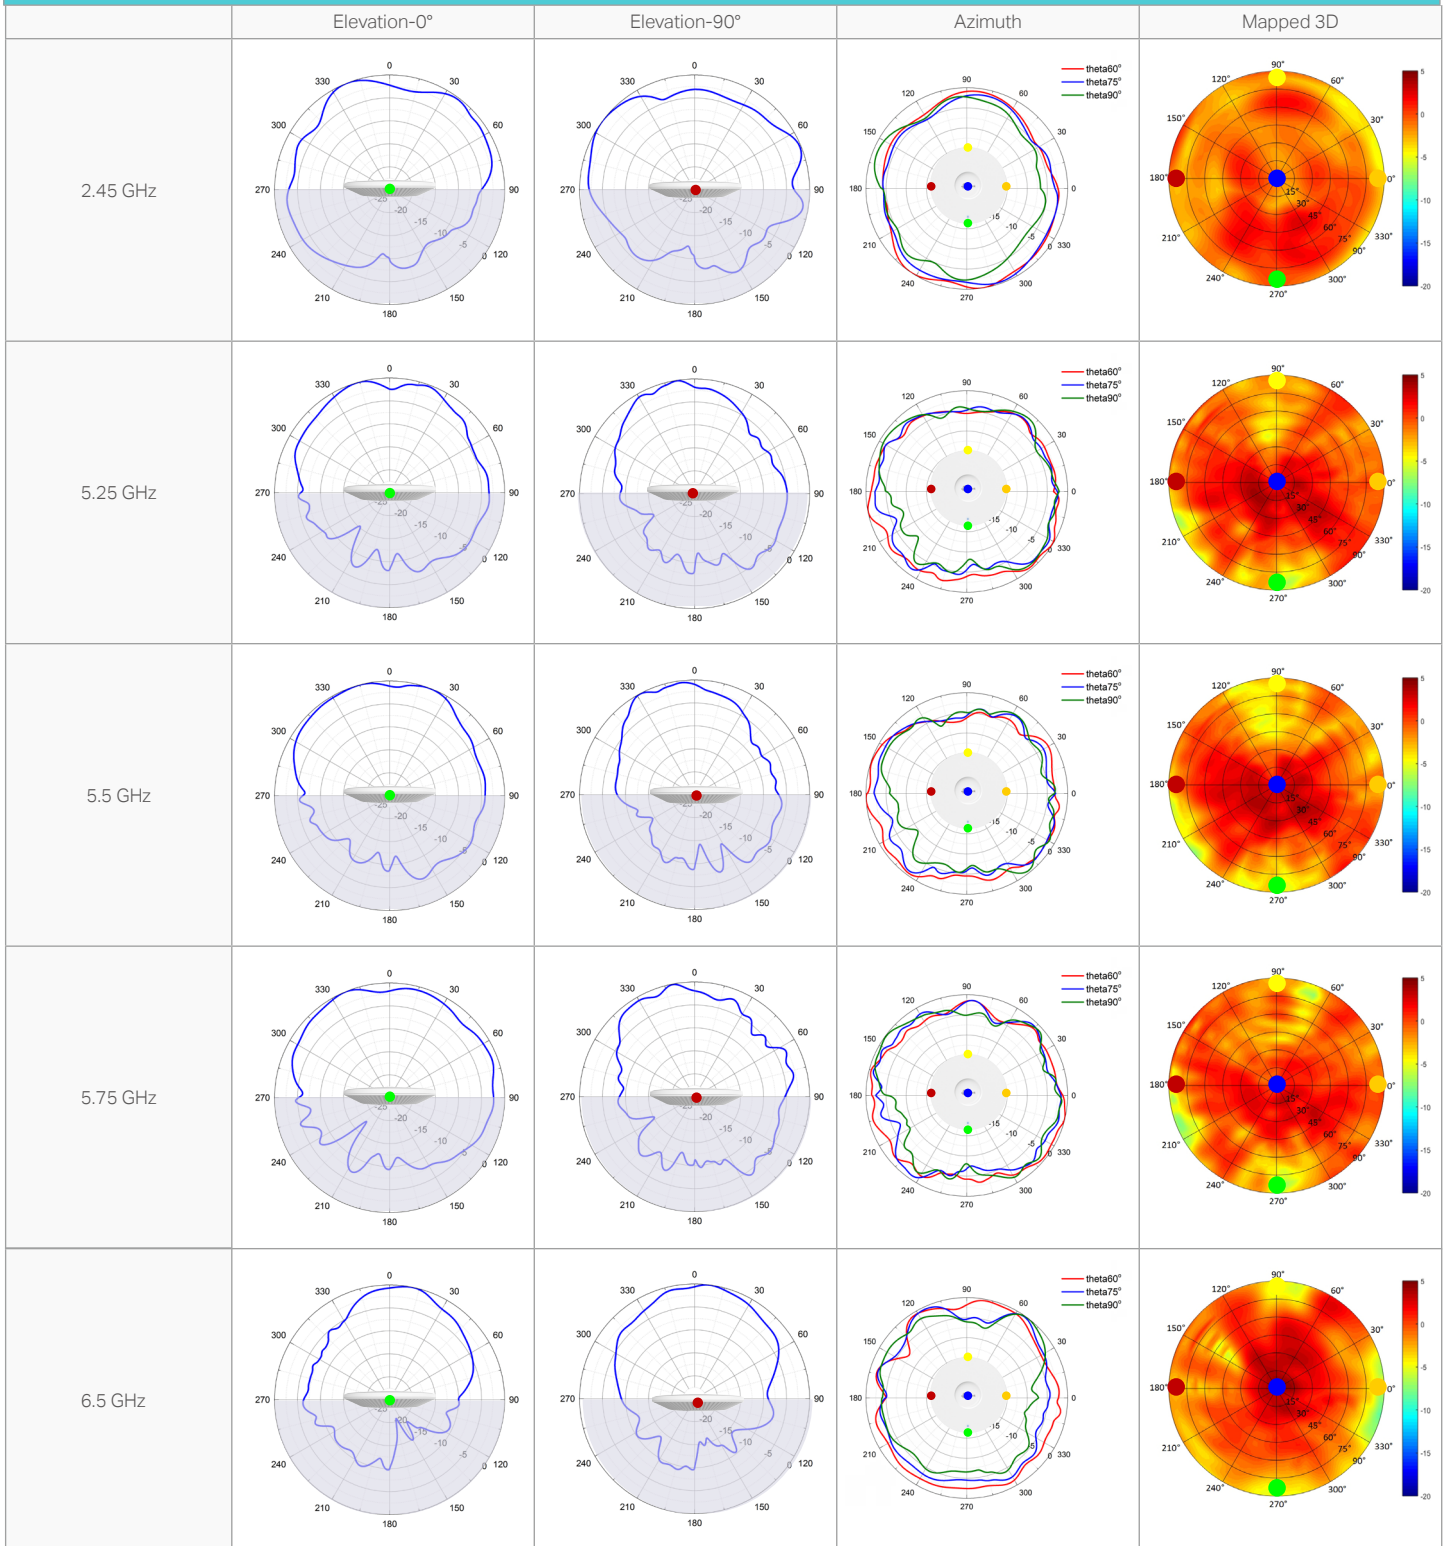

# Disclaimers

## Wireless Speed and Range Disclaimer

Maximum wireless transmission rates are the physical rates derived from IEEE Standard 802.11 specifications. Range and coverage specifications were defined according to test results under normal usage conditions. Actual wireless transmission rate and wireless coverage are not guaranteed, and will vary as a result of 1) environmental factors, including building materials, physical objects and obstacles, 2) network conditions, including local interference, volume and density of traffic, product location, network complexity, and network overhead and 3) client limitations, including rated performance, location, connection quality, and client condition.

## Wireless Client Capacity Disclaimer

Wireless client capacity specifications were defined according to test results under normal usage conditions. Actual wireless client capacity is not guaranteed, and will vary as a result of 1) environmental factors, including building materials, physical objects and obstacles, 2) network conditions, including local interference, volume and density of traffic, product location, network complexity, and network overhead and 3) client limitations, including rated performance, location, connection quality, and client condition.

## Ethernet Port Limitation Disclaimer

Actual network speed may be limited by the rate of the product's Ethernet WAN or LAN port, the rate supported by the network cable, Internet service provider factors and other environmental conditions.

## MU-MIMO Disclaimer

(Only for certain devices)

MU-MIMO capability requires client devices that also support MU-MIMO.

## Seamless Roaming Disclaimer

(Only for certain devices)

Seamless roaming requires both the access point and client devices to support 802.11k and 802.11v protocols.

## Lightning and Electro-Static Discharge Protection Disclaimer

(Only for outdoor devices)

Protection against lightning and electro-static discharge may be achieved through proper product setup, grounding and cable shielding. Refer to the instruction manual and consult an IT professional to assist with setting up this product.

## PoE Disclaimer

PoE budget calculations are based on laboratory testing. Actual PoE power budget is not guaranteed and will vary as a result of client limitations and environmental factors.

Some models featured in this guide may be unavailable in your country or region. Visit TP-Link website for local sales information: [www.tp-link.com](http://www.tp-link.com). Specifications are subject to change without notice.

© 2023 TP-Link